

OPEN JOINT CLADDING SYSTEM

FLATWRAP[®] UV

ENHANCED UV COMMERCIAL-GRADE WRB

FlatWrap[®] UV is a commercial-grade water-resistive barrier (housewrap) with enhanced UV and tear resistance. FlatWrap UV is specially designed for use with architectural designs that incorporate “open joint claddings.” The product features a high performance tri-laminate design with enhanced UV resistance versus typical weather resistant barriers. The black color of the wrap enhances the aesthetic appeal to open joint architecture. When used in conjunction with a rainscreen it provides superior bulk water drainage, exceptional vapor permeability and durability.

- For use with openings up to 1 inch when installed with a minimum 1/4 inch rainscreen
- If not installed with a rainscreen, then opening must not be greater than 1/4 inch
 - Maximum 40% total exposed area
- Virtually invisible when installed in an open wall assembly (up to 1 inch joint)
 - Tri-laminate design is surfactant resistant
- Convenient 500 sq ft roll allows for simple one man installation
- Taping of seams is not required, reducing both material and labor costs

& HYDROFLASH[®] UV

FOR OPEN JOINT CLADDING APPLICATIONS


HydroFlash[®] UV is an aggressive self-adhered flashing accessory for FlatWrap[®] UV. HydroFlash UV is invisible when installed with FlatWrap UV housewrap in open joint cladding applications. The latest technology in flashing adhesion, it can be applied to damp surfaces and installed down to 0°F.

- Black facer is invisible when installed with FlatWrap[®] UV housewrap
 - Can be applied to furring strips
- Specially formulated for aggressive adhesion to FlatWrap UV and other housewraps
 - Can be applied to damp surfaces
 - No primer needed
- Can be applied in cold temperatures down to 0°F
 - Seals around fasteners
- Compatible with a wide array of sealants
 - No VOCs, HFCCs, CFCs
- AAMA 711 approved, meets criteria of AC 148

WIDTH	5 ft
LENGTH PER ROLL	100 ft
MAX UV EXPOSURE (Prior to Cladding Installation)	180 days
WARRANTY	10 (product) 15 (system)
COMPOSITON	Polypropylene tri-laminate
VAPOR PERMEABILITY	35 perms
FIRE RATING	Class A


WIDTH	4 in, 6 in
LENGTH PER ROLL	75 ft
MAX UV EXPOSURE (Prior to Cladding Installation)	180 days
WARRANTY	10 (product) 15 (system)

The Solution for Open Joint Cladding Systems

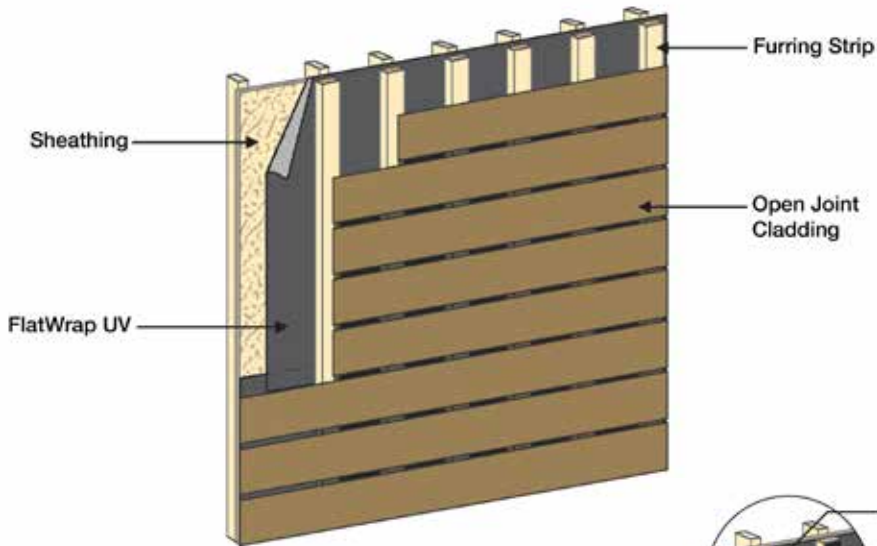

Use with openings up to 1 inch when installed with a minimum 1/4 inch rainscreen

HydroFlash UV can be applied over furring strips for added protection and concealment

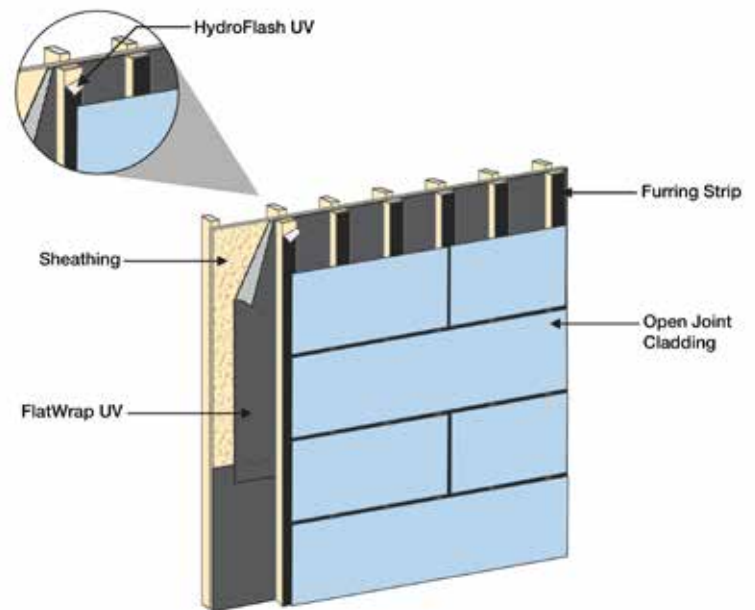

COMPLETE SYSTEM PROTECTION

Peace of mind is what you get when you use FlatWrap UV and HydroFlash UV together. We include our 15 year product and labor warranty that not only warranties manufacturing defects, but performance as well (up to \$20,000 per dwelling).



Visit BenjaminObdyke.com for:

- Installation Instructions
- Jobsite Photos
- Videos