

# SLICKER® HP

## Rainscreen

Provides a big gap (.25 inch) that allows for drainage and drying in the wall assembly


Provides maximum protection for walls, eliminating the deteriorating effects of mold and rot between siding and sheathing

Reduces the chances of premature peeling or blistering of finishes


Commercial-grade housewrap layer has superior tear strength, surfactant resistance and water holdout capabilities

Simplifies and reduces labor by installing rainscreen and housewrap in one easy-to-handle roll

Recommended for wood and fiber cement siding



Slicker® HP is the first all-in-one moisture management solution to feature a detachable rainscreen and premium housewrap in a single application. We have combined the benefit of our Slicker Classic rainscreen and FlatWrap UV premium water resistive barrier (WRB) into one easy to use product. The ability to detach the rainscreen from the housewrap without compromising water holdout simplifies installation and allows installers to use preferred flashing methods.

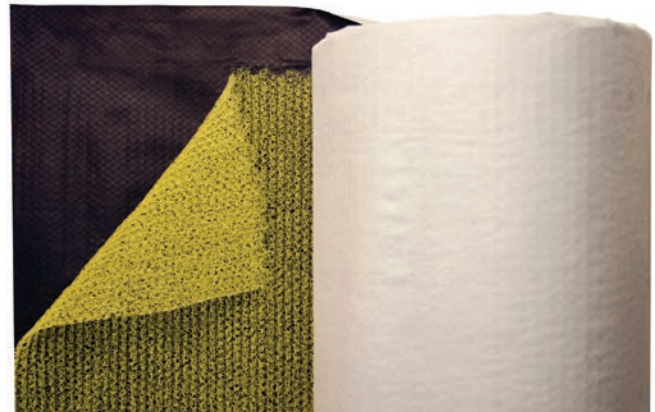

Recommended accessories:

**HYDROFLASH**  
**HYDROCORNER**  
**SLICKER**  
 SCREEN



**Slicker HP**

Detachable rainscreen and premium WRB

<b>Thickness (size of gap)</b>	.25 in (6 mm)
<b>Width</b>	39.37 in (1 m)
<b>Length per roll</b>	61.5 ft (18.75 m)
<b>Coverage per roll</b>	200 ft <sup>2</sup> (18.58 m <sup>2</sup> )
<b>Max. UV exposure</b>	30 days
<b>Warranty</b>	20 (product) or 25 (system)
<b>Composition</b>	Polypropylene (40% pre-consumer recycled)
<b>Vapor Permeability</b>	35 perms