

HydroFLASH® LA

LIQUID APPLIED FLASHING

HydroFlash® LA is designed for exterior flashing of rough openings, transitions, and seams as part of a high performing air and water management system. Liquid Applied flashing is appropriate for the filling of imperfections, penetrations, or sealing of geometrically challenging areas.



Use for challenging details in exterior insulation applications


Use for the sealing of geometrically challenging areas

Approved with all Benjamin Obdyke housewraps

Ideal application for air sealing details

Use to create monolithic sill flashing
& prevent leaks

Cure time is only 6 hours with 20-40 mil
thickness

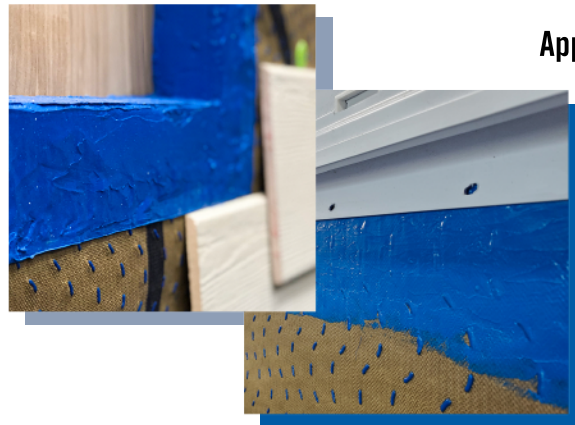

Packaging	20 oz. Sausage/12 per carton
Typical Coverage	8-10 sq ft. per sausage
Cured Thickness	20-40 mils
Compound Technology	STPU
Cure Time	20-40 mils = 6 hrs
Install Temperature	25° - 100°F
Exposure	180 days
Tack Free Time	2-3 hours