




XLP

XTRACTOR VENT®

A low-profile externally baffled ridge vent, Xtractor Vent® XLP works in conjunction with a soffit system to extract heat and moisture out of the attic. XLP ridge vent is designed specifically for fast installation with the use of a nail gun.

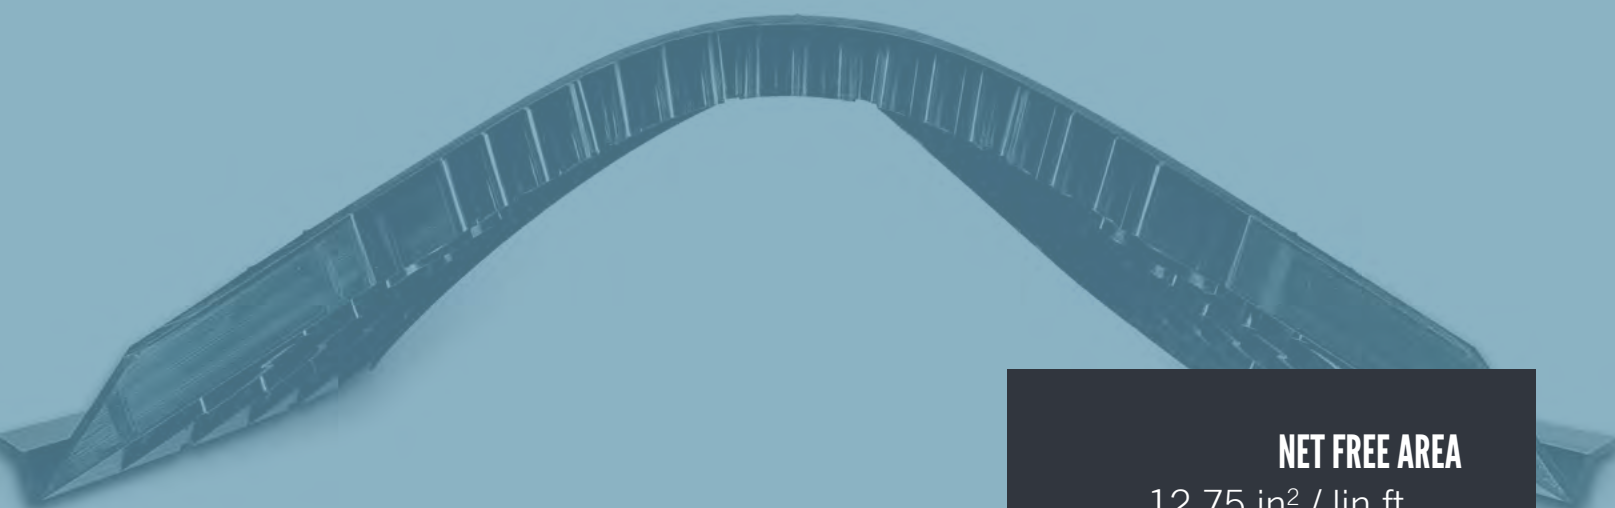

Code Approvals:

Miami Dade
Texas Department of Insurance Product Evaluation (RV-28)
Florida Building Code (FL 7751)
Meets or exceeds: FHA, HUD, ICC, MDC and NBC

NET FREE AREA
12.75 in² / lin ft

WIDTH
14 in

LENGTH
4 foot sections

THICKNESS
.625 in

WARRANTY
Lifetime Limited

Integrated end plugs throughout for structural integrity and to reduce scrap

Embossed nail lines for correct nail placement and an embossed center line for proper alignment on the ridge

External and internal baffles prevent wind driven rain and snow infiltration

Hot dipped collated galvanized ring-shank nails included

Low-profile sectional design

Compression resistant design

Nail-gunnable for fast installation

