

# RAINSCREEN SYSTEM PROTECTION

Slicker® Family | FlatWrap® HP | Accessories






DRIES BEHIND CLADDING



REMOVES BULK WATER

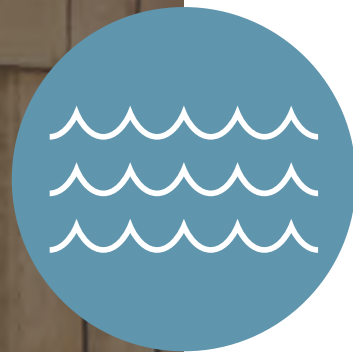


# SLICKER RAINSCREEN SYSTEM

Our Slicker Rainscreen System is the most robust solution you'll find if you're looking for maximum protection and durability for your wall system. The Slicker family of rainscreens provide drainage and at least a 3/8" ventilated space for drying capacity behind the siding. Teamed up with Flatwrap HP housewrap and HydroFlash self-adhered flashing, this system provides an iron-clad protection system warrantied for 35 years.

The rainscreen system for siding or masonry is ideal for high-wind driven rain areas and behind absorptive claddings like wood, fiber cement, and stucco. The 3/8" ventilated space of Slicker requires planning and budget allocation, but a rainscreen upgrade is a small premium to provide protection, durability, and longevity for your siding investment.

## 35 YEAR SYSTEM WARRANTY

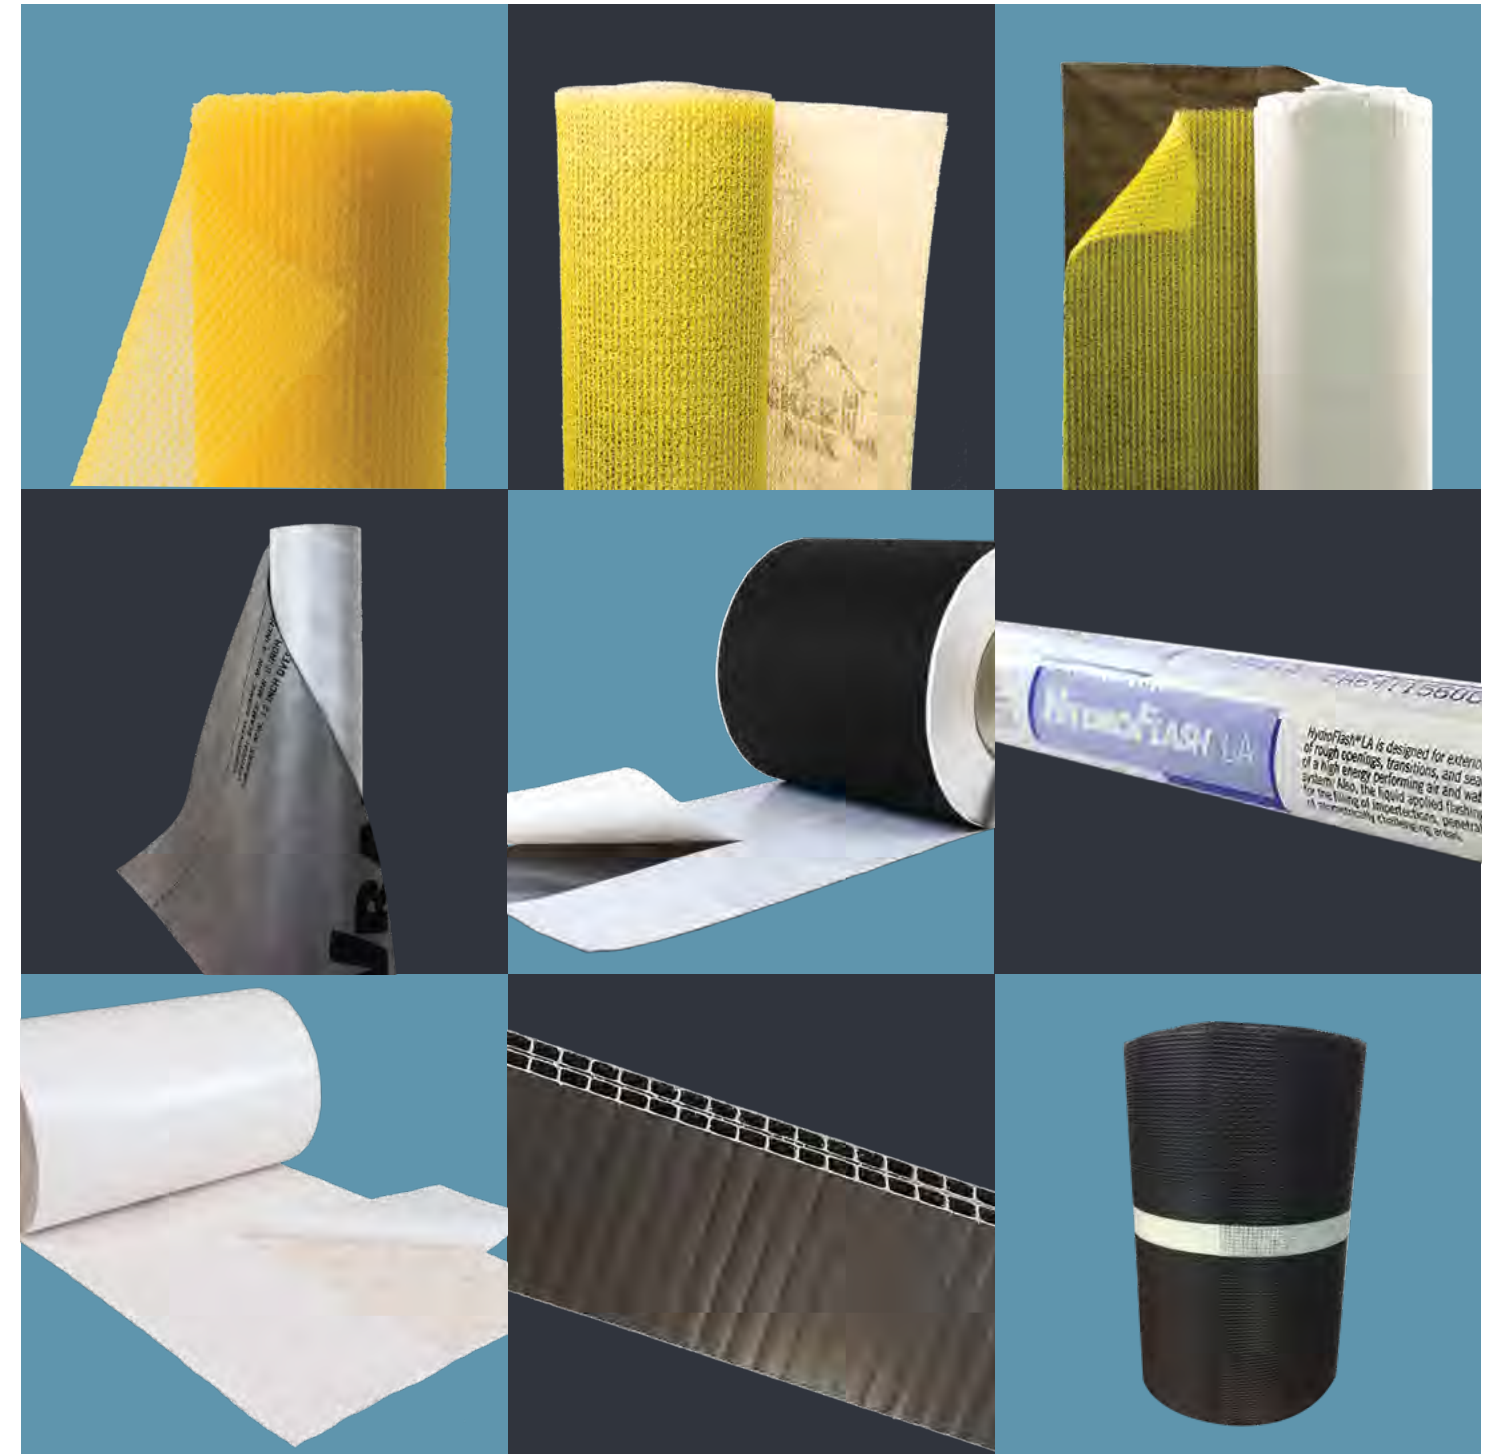



# Water will find a way in.

Most building scientists not only believe this fact, but also agree that the best way to avoid issues caused by moisture in exterior walls is to provide a way for that moisture to escape.

And that’s where we come in. At Benjamin Obdyke, we’re passionate about protecting homes and buildings from moisture damage - and have been since 1868. Using building science as our guide, we develop solutions that allow the owner and building professional to BUILD BETTER for the long term - without breaking the bank.

We hope this guide helps you determine the best wall protection option for your project. When in doubt, call us! We’re proud to be “nerds” about best building practices and welcome any opportunity to consult with building professionals or owners.

## SELECTING A SYSTEM

### Average rainfall per year?



### What kind of cladding will be used?



### Level of budget concern?



## Trying to decide which rainscreen is best for your project?

Take a look at some of the factors to consider when deciding which Slicker® Rainscreen works best for your cladding and exterior envelope. Do you have a unique build that you would like to discuss in more detail? Give us a call at (800) 523-5261 or email us at techsupport@obdyke.com.



### OTHER CONSIDERATIONS

Cedar Shakes & Shingles	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Horizontal Wood Plank Siding	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Vertical Wood Plank Siding		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Composite	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Fiber Cement		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Stone Veneer		<input checked="" type="checkbox"/>	
Stucco		<input checked="" type="checkbox"/>	

### OTHER CONSIDERATIONS

Pre-Determined WRB pre-weatherized sheathing, self-adhered housewrap, etc.	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
Rigid Insulation Boards in wall assembly	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
MAX. UV Exposure	30 Days	90 Days	30 Days
Need a WRB?	Check out FlatWrap® HP		<input checked="" type="checkbox"/>

Are you working with an Open Joint Siding application? Check out our Open Joint System Protection, including InvisiWrap UV, HydroFlash UV+, and Batten UV.



Slicker® Classic is the original rolled rainscreen. The unique, vertically channeled, three-dimensional matrix of Slicker provides a continuous space for drainage and drying, eliminating the threat of trapped moisture.

Provides maximum protection for the wall system, eliminating the deteriorating effects of mold and rot between the siding and sheathing

Reduces the chances of premature peeling or blistering of finishes

Prevents damage from surfactants by separating the cladding from the water resistive barrier

Saves time and labor costs by eliminating the need for furring strips



**THICKNESS (SIZE OF GAP)**

.25 in (6 mm) / .40 in (10 mm)

**LENGTH PER ROLL**

46.5 ft (14.17 m) / 38.5 ft (11.74 m)

**COVERAGE PER ROLL**

150 sq ft / 125 sq ft

**WIDTH PER ROLL**

39.37 in (1 m)

**MAX. UV EXPOSURE**

30 days





#### THICKNESS (SIZE OF GAP)

.25 in (6 mm) / .40 in (10 mm)

#### LENGTH PER ROLL

61.5 ft (18.75 m) / 38.5 ft (11.74 m)

#### COVERAGE PER ROLL

200 sq ft / 125 sq ft

#### WIDTH PER ROLL

39.37 in (1 m)

#### MAX. UV EXPOSURE

90 days

Slicker® MAX rainscreen includes a filter fabric, providing enhanced UV and compression resistance. Slicker MAX is ideal for providing drainage and ventilation behind fiber cement, stone veneer, and stucco applications.

Fabric serves as “sacrificial layer” in stone or stucco applications, while preventing mortar from blocking drainage and drying channels

Additional fabric layer protects matrix from UV exposure and adds compression resistance

Provides maximum protection for the wall system, eliminating the deteriorating effects of mold and rot between the siding and sheathing

Reduces the chances of premature peeling, blistering, or cracking of finishes

Prevents damage from surfactants by separating the cladding from the water resistive barrier



Slicker® HP is the first all-in-one moisture management solution to feature a detachable rainscreen and premium housewrap in a single application. We have combined the benefit of our Slicker Classic rainscreen and FlatWrap HP WRB into one easy to use product.

Provides maximum protection for walls, eliminating the deteriorating effects of mold and rot between siding and sheathing

Reduces the chances of premature peeling or blistering of finishes

Commercial-grade housewrap layer has superior tear strength, surfactant resistance, and water holdout capabilities

Simplifies and reduces labor by installing rainscreen and housewrap in one easy-to-handle roll

Detachable rainscreen allows installers to use preferred flashing methods without compromising water holdout



RAINSCREEN + PREMIUM WRB

**THICKNESS (SIZE OF GAP)**

.25 in (6 mm)

**LENGTH PER ROLL**

61.5 ft (18.75 m)

**COVERAGE PER ROLL**

200 sq ft.

**WIDTH PER ROLL**

39.37 in (1 m)

**MAX. UV EXPOSURE**

30 days



# FLATWRAP<sup>®</sup>HP

HIGH PERFORMANCE WRB

## WIDTH

3 ft, 5 ft, & 9 ft

## LENGTH PER ROLL

100 ft (30.48 m)

## MAX. UV EXPOSURE

120 days

## VAPOR PERMEABILITY

15-20 perms\*

\*Pending final AC38 test results

FlatWrap<sup>®</sup> HP is a commercial-grade water-resistive barrier (housewrap). When used in conjunction with a rainscreen wall, it provides superior bulk water drainage, exceptional vapor permeability and durability.

FlatWrap HP is a perfect complement to Slicker<sup>®</sup> products as the WRB component in a rainscreen wall system. It can also be paired with HydroGap<sup>®</sup> Drainable housewrap as the required secondary layer in stone or stucco applications.



# HydroFLASH® UV+

ENHANCED ADHESION FOR EXTREME CONDITIONS

HydroFlash UV+ is a unique, high performance tape that offers breathability without sacrificing long-term adhesion. Reducing potential for condensation build-up and moisture damage, this “european-grade” tape offers a vapor permeable acrylic adhesive paired with a uv-resistant durable facer. HydroFlash UV+ is a premium flashing solution for use with all housewraps, but also meets long-term UV exposure requirements for open joint siding applications.

**WIDTH**

2.3 in (60 mm), 4 in (100 mm),  
6 in (150 mm)

**LENGTH PER ROLL**

82 ft. (25 m)

**ADHESIVE**

Acrylic

**MAX. UV EXPOSURE**

365 days (before siding coverage)

**TEMPERATURE RANGE**

Install down to 25°F,  
store above 40°F

**VAPOR PERMEABILITY**

4 perms

# HydroFLASH® LA

LIQUID APPLIED FLASHING

HydroFlash® LA is designed for exterior flashing of rough openings, transitions, and seams as part of a high performing air and water management system. Liquid Applied flashing is appropriate for the filling of imperfections, penetrations, or sealing of geometrically challenging areas.

**PACKAGING**

20 oz. Sausage/12 per carton

**TYPICAL COVERAGE**

12-15 sq. ft. per sausage

**CURED THICKNESS**

20-40 wet mils.

**COMPOUND TECHNOLOGY**

STPU Silyl Terminated Polyurethane

**TACK FREE TIME**

2-3 hours

**CURE TIME**

6 hrs

**INSTALL TEMPERATURE**

25° - 100° F

**EXPOSURE**

180 days

**VAPOR PERMEABILITY**

3-6 perms (20-40 wet mils)



# HydroFlash® GP

GENERAL PURPOSE SELF-ADHERED FLASHING

HydroFlash® GP Self-Adhered Flashing is a specially formulated acrylic technology for aggressive adhesion to Benjamin Obdyke housewraps. HydroFlash® GP can be installed down to twenty-five degrees Fahrenheit.

**WIDTH**

2.3 in (60 mm), 4 in (100 mm),  
6 in (150 mm), 9 in (230 mm)

**LENGTH PER ROLL**

82 ft. (25 m)

**ADHESIVE**

Acrylic

**MAX. UV EXPOSURE**

180 days

**TEMPERATURE RANGE**

Install down to 25°F,  
store above 40°F

# BATTEN UV

Batten UV works as a starter strip for the Slicker rain-screen family. It maintains an opening for drainage and airflow, while providing protection from most insects.

**THICKNESS (SIZE OF GAP)**

.375 in

**WIDTH**

1.5 in

**LENGTH PER BATTEN**

37.5 in (.95 m)

**PACKAGING**

64 battens per carton

**MAX. UV EXPOSURE**


365 days (before siding coverage)

**COMPOSITION**

Polyethylene




# SLICKER<sup>®</sup> SCREEN

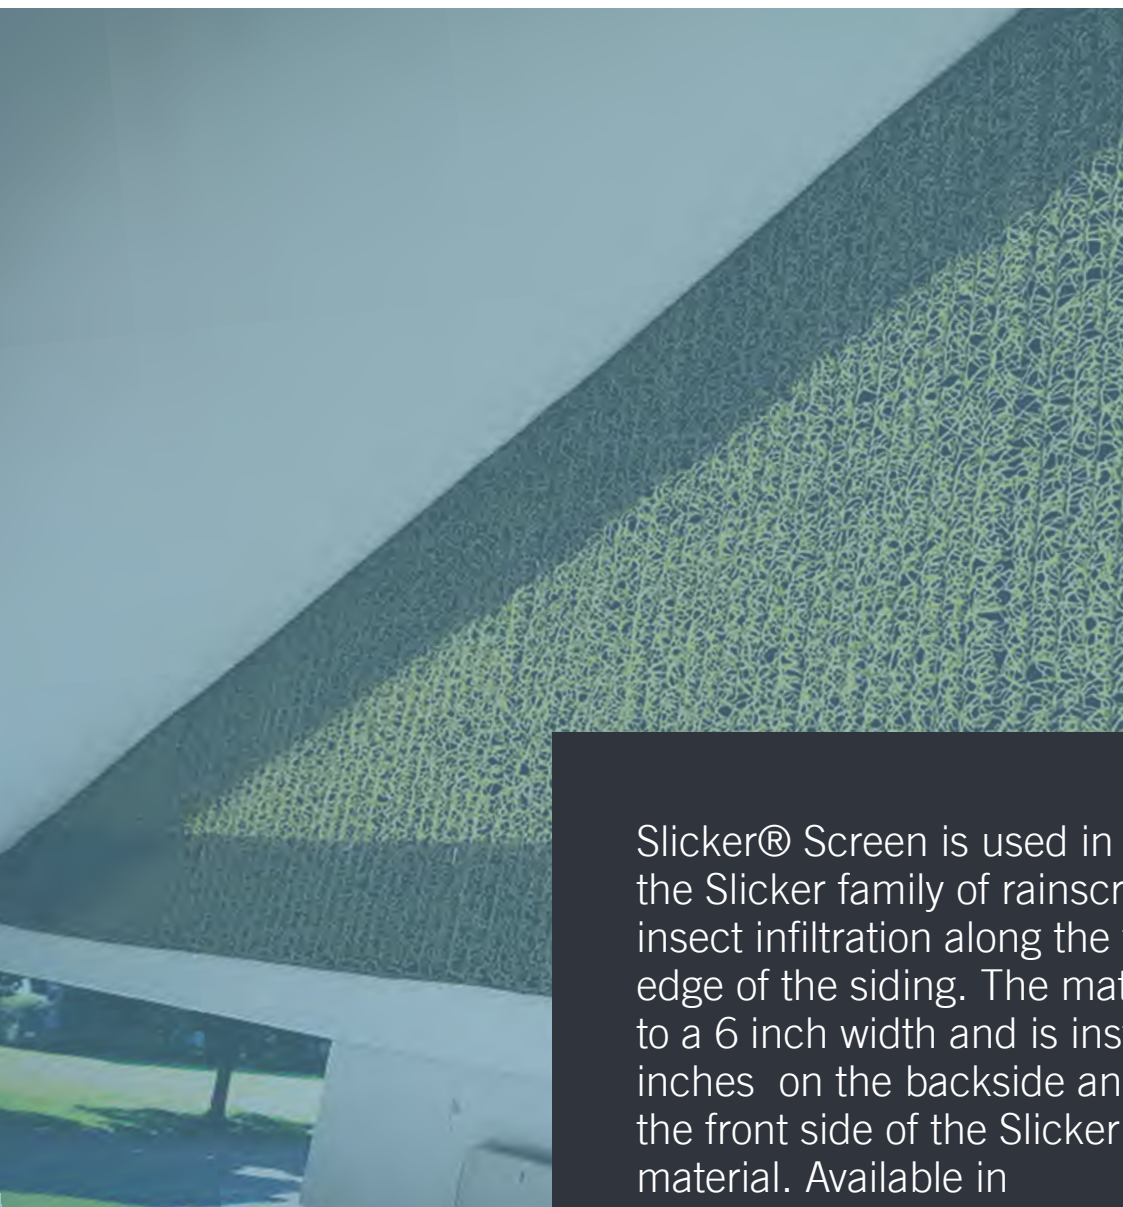

Slicker<sup>®</sup> Screen is used in conjunction with the Slicker family of rainscreens to prevent insect infiltration along the top and bottom edge of the siding. The material is precut to a 6 inch width and is installed with three inches on the backside and 3 inches on the front side of the Slicker rainscreen material. Available in 6 in. x 100 ft. rolls.

# HYDROCORNER

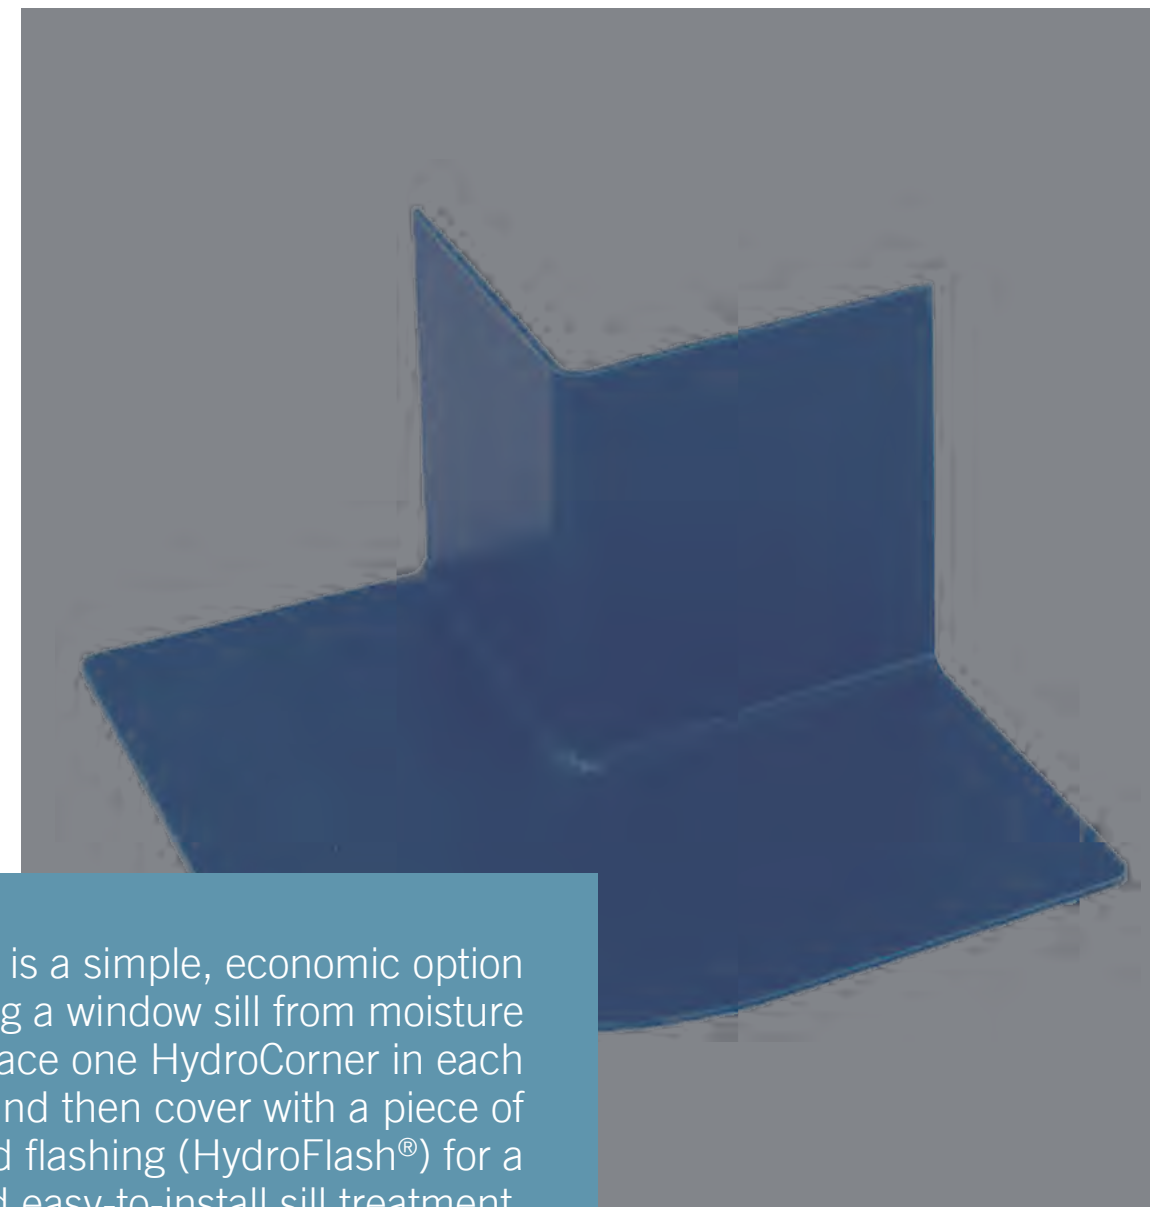

HydroCorner<sup>®</sup> is a simple, economic option for protecting a window sill from moisture intrusion. Place one HydroCorner in each sill corner, and then cover with a piece of self-adhered flashing (HydroFlash<sup>®</sup>) for a quick and easy-to-install sill treatment.



# Build Better

with Benjamin Obdyke  
Roof & Wall products


## ROOF SYSTEMS

### RIDGE VENTILATION PRODUCTS

roll vent®  
rapid ridge®  
cougar® lp  
shark vent®  
xtractor vent®

### WOOD / METAL ROOF SYSTEM

cedar breather®  
rapid ridge® 7  
batten uv

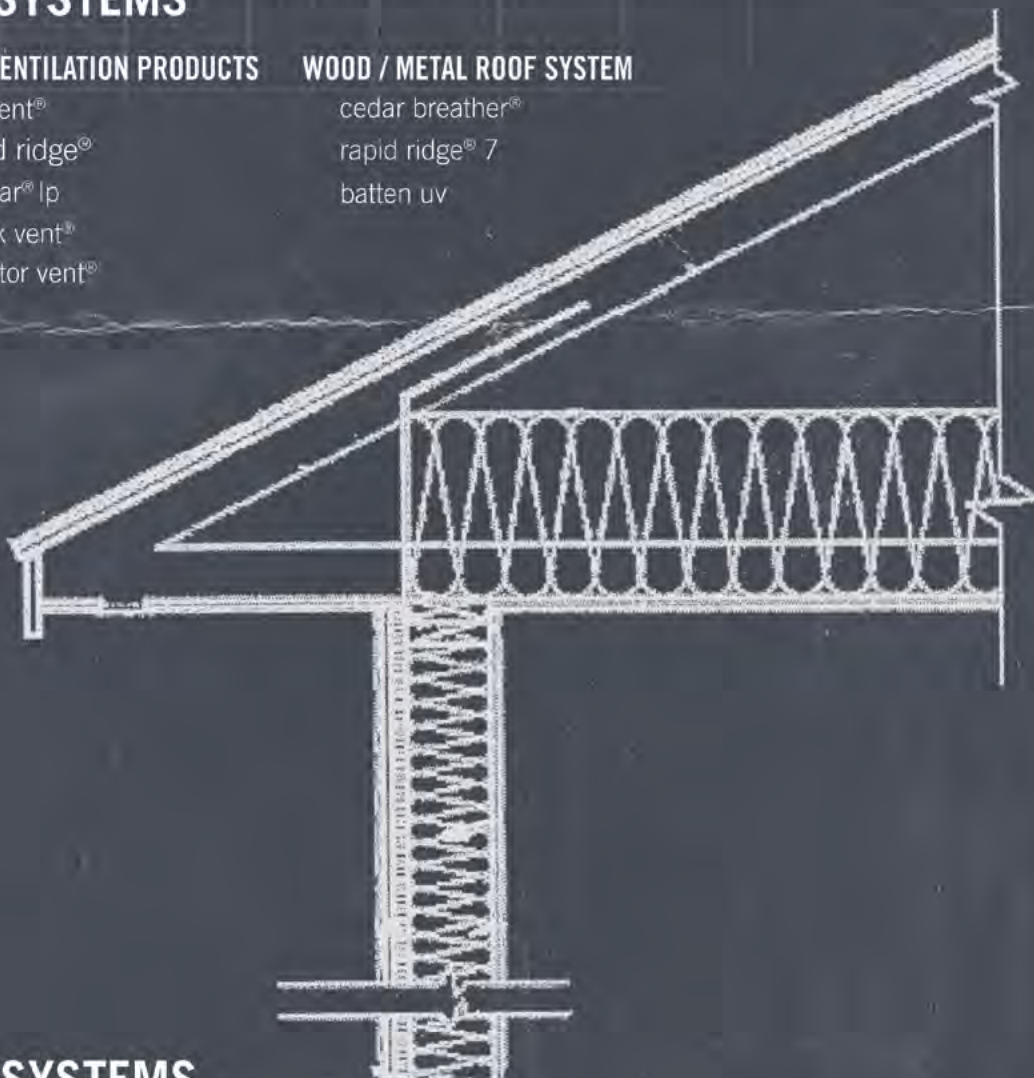

## WALL SYSTEMS

### AIR BARRIER DRAINABLE HOUSEWRAP SYSTEM

hydrogap® sa  
hydroflash® uv+  
hydroflash® la

### UV-PROTECTED RAINSCREEN SYSTEM

invisiwrap® uv  
hydroflash® uv+  
batten uv

### RAINSCREEN SYSTEM

slicker® rainscreen  
flatwrap® hp  
hydroflash®  
slicker® screen  
batten uv

### DRAINABLE HOUSEWRAP SYSTEM

hydrogap® drainable housewrap  
hydroflash®

### HOUSEWRAP SYSTEM

flatwrap® hp  
hydroflash®



**BENJAMIN OBDYKE**  
roof & wall products

©2021 Benjamin Obdyke Incorporated. Cedar Breather®, Cougar®, Slicker®, Roll Vent®, Rapid Ridge®, Shark Vent®, Xtractor Vent®, FlatWrap®, HydroGap®, HydroFlash®, and HydroCormer® are registered trademarks of Benjamin Obdyke Incorporated.

PRINTED 2021