

HORIZONTAL SEAMS: MIN. 4 INCH OVERLAP
VERTICAL SEAMS: MIN. 6 INCH OVERLAP
CORNERS: MIN. 12 INCH OVERLAP

FLATWRAP[®]HP
COMMERCIAL-GRADE WRB

**BENJAMIN
OBDYKE**

roof & wall products

FLATWRAP[®]HP

COMMERCIAL-GRADE WRB

**BENJAMIN
OBDYKE**

roof & wall products

FLATWRAP[®] HP

COMMERCIAL-GRADE WRB

FlatWrap[®] HP is a commercial-grade water resistive barrier (housewrap) with enhanced tear resistance. FlatWrap HP is a perfect complement to Slicker[®] products as the WRB component in a rainscreen wall system.

Tri-laminate design resists damage from surfactants that can compromise other brands of housewrap

Taping of seams is not required, reducing both labor and material costs

To achieve 15 year product and labor warranty, pair with any of Obdyke's flashing options

HORIZONTAL SEAMS: MIN. 4 INCH
VERTICAL SEAMS: MIN. 6 INCH
CORNERS: MIN. 12 INCH OVER

Width	3 ft (1 m), 5 ft (1.5 m), 9 ft (2.7 m)
Length per Roll	100 ft (30.48 m)
Max. UV Exposure	120 days
Composition	Polypropylene Tri-Laminate
Vapor Permeability	15-20 perms*
Fire Rating	Class A
Warranty	10 (product) or 15 (system)

*Pending final AC38 test results

**BENJAMIN
OBDYKE**

roof & wall products

800.523.5261 • info@obdyke.com

FLASHING & TAPES

HydroFLASH® GP

GENERAL PURPOSE SELF-ADHERED FLASHING



Special acrylic technology for aggressive adhesion

AAMA 711 approved

Available widths: 2.3 in, 4 in, 6 in, & 9 in

Split release liner (6 in & 9 in)

Abrasion resistant facer

Aggressive acrylic adhesive is ideal on all Benjamin Obdyke housewraps

Ideal flashing for Open Joint Cladding applications

UV Rated for 365 days before cladding installation

Available widths: 2.3 in, 4 in, & 6 in

Vapor open for a variety of applications

AAMA 711 approved

HydroFLASH® UV+

ENHANCED ADHESION FOR EXTREME CONDITIONS



HydroFLASH® LA

LIQUID APPLIED FLASHING

For the sealing of geometrically challenging areas

Used in conjunction with exterior insulation

Ideal application for air sealing details

Used to create monolithic sill flashing & prevent leaks

Cure time is only 6 hours with 20-40 mil thickness

2-3 hour tack time



Build Better™

with Benjamin Obdyke
Roof & Wall products


SECTIONAL RIDGE VENTILATION
XTRACTOR VENT®

ROLLED RIDGE VENTILATION
ROLL VENT®
RAPID RIDGE®
COUGAR® LP

CEDAR PROTECTION
CEDAR BREATHER®
RAPID RIDGE® 7

BAFFLED RIDGE VENTILATION
SHARK VENT®

ROOF PRODUCTS

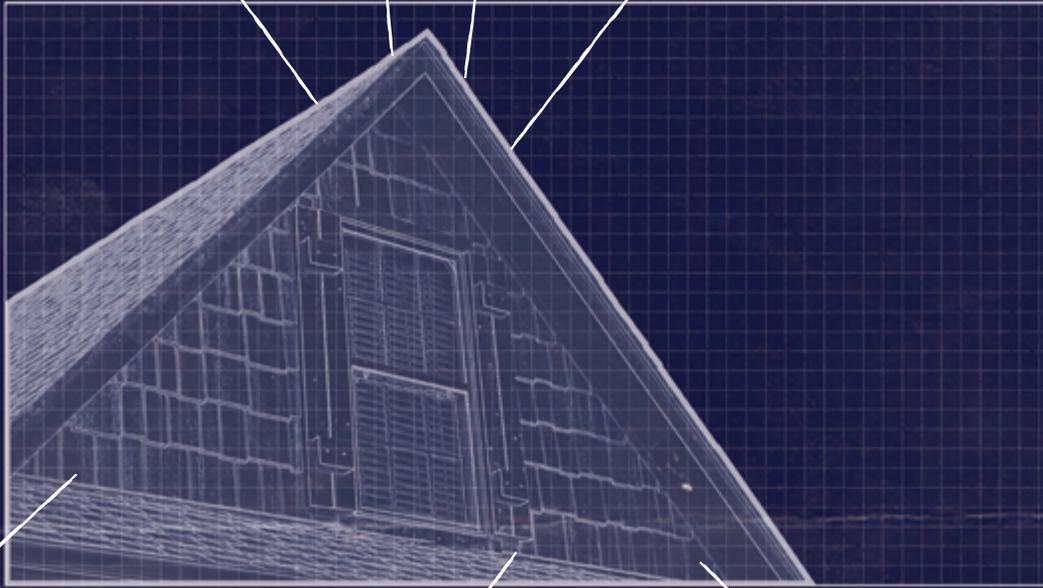

WALL PRODUCTS

DRAINABLE HOUSEWRAP
HYDROGAP®

OPEN JOINT SYSTEM
INVISIWRAP™ UV

RAINSCREEN SOLUTIONS
SLICKER® CLASSIC
MAX
HP

FLASHING

HYDROFLASH® UV+
GP
LA

ACCESSORIES

BATTEN UV **FLATWRAP® HP**
SLICKER® **HYDROCORNER**
SCREEN

**BENJAMIN
OBDYKE**

400 Babylon Rd. Suite A • Horsham, PA 19044
BenjaminObdyke.com • (800) 523-5261



© 2020 Benjamin Obdyke Incorporated: Cedar Breather®, Cougar®, Slicker®, Roll Vent®, Rapid Ridge®, Shark Vent®, Xtractor Vent®, FlatWrap®, HydroGap®, HydroFlash®, and HydroCorner™ are trademarks or registered trademarks of Benjamin Obdyke Incorporated. Printed 2020