

### WIDTH

4.75 ft (1.45 m)

# **LENGTH PER ROLL**

80 ft (24.38 m)

# MAX. UV EXPOSURE

120 days

#### COMPOSITION

Polypropylene tri-laminate

# **VAPOR PERMEABILITY**

12 perms

#### **ADHESION**

Continuous Acrylic

### FIRE RATING


Class A



1mm spacers create a true drainage space with 96% drainage efficiency and removes water 2x faster than flat housewraps

Full line of flashing accessories available to complete the system and achieve warranty coverage for 20 years

**Adheres to OSB, CDX, plywood, and CMU** without the use of a primer above 25° F

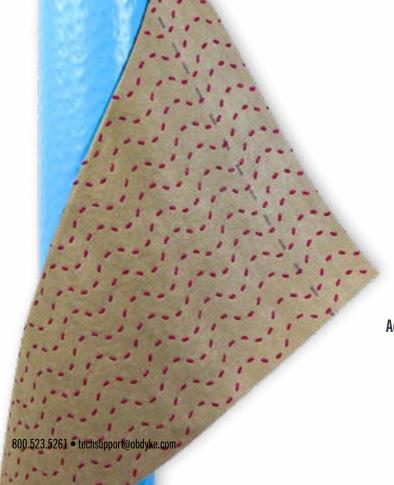

BENJAMIN OBDYKE
roof & wall products