RIDGE VENTILATION PRODUCT SOLUTIONS

'ent° | Rapid Ridge° Shark Vent° | Xtractor Vent°

> BENDAVIN OBDYKE roof & wall products

RIDGE VENTILATION PRODUCTS

Whatever flavor of ridge ventilation you're after – we've got it. As the inventors of the first ridge vent on a roll (Roll Vent), we have over 30 years of experience in ridge vent technology.

With over 100 million linear feet of ridge vent sold since 1987, we're proud to be a trusted resource for high-quality ridge ventilation products and expertise.

LIFETIME LIMITED WARRANTY










Ridge Vent works on the basis of several principles.

Adequate soffit ventilation coupled with ridge ventilation produces a pathway for continuous airflow along the entire underside of the roof deck. Airflow is maintained two ways.

First, hot air naturally rises and exits out the ridge vent, pulling in cooler air from below. Second, positive airflow across the ridge of the house creates a "venturi effect", or a negative pressure, which pulls air out of the ridge vent and brings in cooler air from the soffits below. In calm or windy weather, the entire attic is vented by a constant flow of cooler, dryer outside air.


HOW RIDGE VENT WORKS

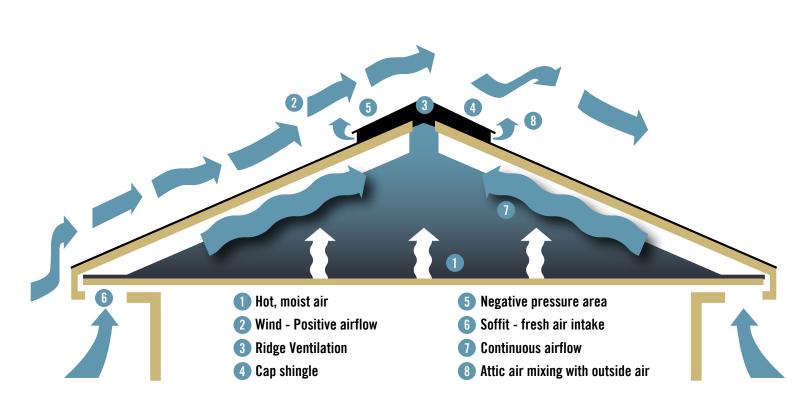

Trying to decide which ridge vent is best for your project?

Take a look at some of the factors to consider when deciding which ridge vent works best for your style, installation, and aesthetic. Do you have a unique build that you would like to discuss in more detail? Give us a call at (800) 523-5261 or email us at techsupport@obdyke.com.

			STYLE	
	NET FREE ADE	Routen H.	SECTION.	Hahn
Roll Vent standard	18	•		•
Roll Vent metric	18	•		•
Rapid Ridge standard	12.5	•		
Rapid Ridge metric	12.5	•		
Rapid Ridge 7	12.5	•		
Cougar LP	13.5	•		
Xtractor Vent XLP	12.75		•	
Xtractor Vent XLP xtra	12.75		•	
Xtractor Vent X18	18		•	•
Xtractor Vent X18 xtra	18		•	•
Shark Vent XLP	12	•		
Shark Vent XLP xtra	12	•		

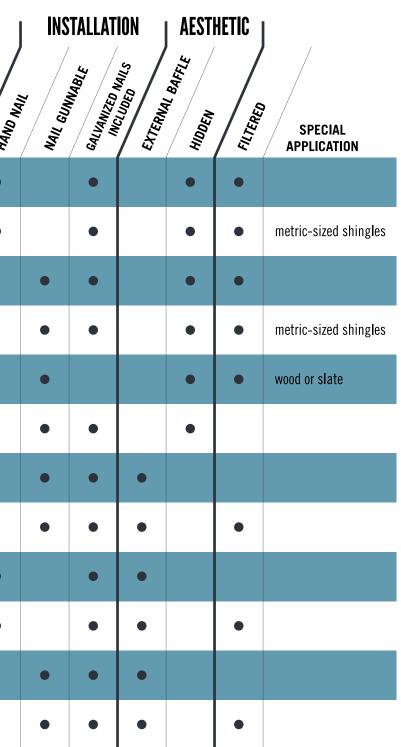



Roll Vent® ridge vent offers the most innovative, effective way to protect residential roofing from the deteriorating forces of excess heat and moisture build-up. Roll Vent is available in 20 or 50 foot rolls and in Metric size.

Breathable weather barrier that prevents rain, snow and insect infiltration

Wing tip design prevents shingles from folding over ridge vent, cutting off ventilation

End plug free installation saves time by shingling over

See-through hinge makes it easy to center over the ridge

Visible nail line for easier alignment

Compression resistant design

Department of Insurance Product Evaluation (RV-01) - Standard Only Florida Building Code (FL 7751) - Standard Only Meets or exceeds: ICC, FHA, HUD, and NBC

NET FREE AREA 18 in² / lin ft 381 cm² / lin m

WIDTH 10.5 in 29.21 cm (11.5 in)

LENGTH

20 ft & 50 ft rolls 6.1 m (20 ft) rolls

THICKNESS

2.29 cm (.9 in) .9 in

WARRANTY

Lifetime Limited



VENT

RIDGE

standard | metric





standard | metric

NET FREE AREA 12.5 in²/ lin ft 265 cm² / lin m

WIDTH

10.5 in 29.21 cm (11.5 in)

LENGTH

20 ft & 50 ft rolls 6.1 m (20 ft) rolls

THICKNESS

1.59 cm (.625 in) .625 in

WARRANTY

Lifetime Limited

Rapid Ridge® nail-gunnable ridge vent offers the quickest installation of any rolled roof ventilation product on the market, complete with superior weather and insect infiltration protection. The lightest ridge vent on a roll, Rapid Ridge is available in three widths – Rapid Ridge Standard, Rapid Ridge 7, and Rapid Ridge Metric.

Low profile design provides sleek and almost invisible protection

Breathable weather barrier prevents rain, snow, and insect infiltration

Wing tip design prevents shingles from folding over ridge vent, cutting off ventilation

See-through hinge makes it easy to center over the ridge

End plug free installation saves time by shingling over

Hot dipped collated galvanized ring-shank nails included

Nail-gunnable for fast installation

Compression resistant design

oduct Evaluation (RV-01) - Standard On orida Building Code (FL 7751) - Standard Only eds: ICC_EHA_HUD_and_NB



Rapid Ridge® 7 is specifically designed for use with narrow hip and ridge shingles, cedar and slate. For optimum performance in wood roofing applications use Rapid Ridge 7 with Cedar Breather®. Rapid Ridge is also available in Standard and Metric sizes.

Made specifically for narrow hip and ridge shingles, including cedar and slate

Low profile design provides sleek and almost invisible protection

Wing tip design prevents shingles from folding over ridge vent, cutting off ventilation

See-through hinge makes it easy to center over the ridge

Compression resistant design

Hot dipped collated galvanized ring-shank nails included

NET FREE AREA 12.5 in² / lin ft

WIDTH 7 in

LENGTH 20 ft rolls

THICKNESS .625 in

WARRANTY Lifetime Limited

Code Approvals: Meets or exceeds: ICC, FHA, HUD, and NBC







NET FREE AREA 13.5 in² / lin ft

> WIDTH 10.5 in

LENGTH 20 ft & 50 ft rolls

> THICKNESS .6 in

WARRANTY Lifetime Limited

included).

Low-profile design provides a sleek and almost invisible protection

End plug free installation saves time by shingling over

Flat back for easy installation

Nail-gunnable for fast installation

Hot dipped collated galvanized ring-shank nails included

Easy to handle, lightweight roll

Compression resistant design

Cougar® LP Ridge Vent is an easy to install classic style ridge vent. It can be installed by hand or with a pneumatic nail gun (coil nails are

Florida Building Code (FL 7751 Meets or exceeds: ICC, FHA, HUD, and NB

Meet the best of both worlds. Shark Vent combines the rigidity of a sectional vent, with the fast installation of a roll. Also available in a filtered option for additional peace-of-mind in extreme weather areas.

Patented internal and external baffle system prevents wind-driven rain and snow infiltration

Nail guides, slot guides, and center guide to simplify the alignment of shingles and nail placement

New external baffle design that conforms better to architectural shingles

Low-profile design creates a smooth finish and resists cracking in cold weather applications

Hot dipped collated galvanized ring-shank nails included

Easy to handle, lightweight roll

Compression resistant design

Available with filter fabic:



Code Approvals Miami Dade - XLP Only Florida Building Code (FL 7751) - XLP Only Meets or exceeds: FHA, HUD, ICC, MDC and NBC



NET FREE AREA 12 in² / lin ft

WIDTH 14.75 in

LENGTH 25 ft rolls

THICKNESS .625 in

WARRANTY Lifetime Limited





EXTERNALLY BAFFLED **RIDGE VENT**

NET FREE AREA 18 in^2 / lin ft

> WIDTH 14.75 in

LENGTH 4 foot sections

> **THICKNESS** .8125 in

WARRANTY Lifetime Limited

Xtractor Vent® X18 externally baffled, shingle over ridge vent offers maximum roof ventilation – 18 square inches of net free area per linear foot – for ultimate protection from heat and moisture. X18 is also available with an internal filter option for extra protection against extreme weather, X18 Xtra.

Integrated end plugs throughout for structural integrity and to reduce scrap

Pre-drilled nail holes for proper fastening of vent

Embossed nail lines for correct nail placement and an embossed center line for proper alignment on the ridge

External and internal baffles prevent wind driven rain and snow infiltration

Maximum ventilation, 18 square inches of net free area per linear foot

Compression resistant design

Narrow 1/8 in. wide vent holes

Available with filter fabic:



Texas Department of Insurance Product Evaluation (RV-28) Florida Building Code (FL 7751) Meets or exceeds: FHA, HUD, ICC, MDC and NBC



A low-profile externally baffled ridge vent, Xtractor Vent® XLP works in conjunction with a soffit system to extract heat and moisture out of the attic. XLP ridge vent is designed specifically for fast installation with the use of a nail gun. XLP is also available with an internal filter option for extra protection against extreme weather, XLP Xtra.

Integrated end plugs throughout for structural integrity and to reduce scrap

Embossed nail lines for correct nail placement and an embossed center line for proper alignment on the ridge

External and internal baffles prevent wind driven rain and snow infiltration

Hot dipped collated galvanized ring-shank nails included

Low-profile sectional design

Compression resistant design

Nail-gunnable for fast installation

Available with filter fabic:



NET FREE AREA 12.75 in² / lin ft

WIDTH 14 in

LENGTH 4 foot sections

THICKNESS .625 in

WARRANTY Lifetime Limited









with Benjamin Obdyke Roof & Wall products

ROOF SYSTEMS

RIDGE VENTILATION PRODUCTS

roll vent rapid ridge[®] cougar®lp shark vent® xtractor vent® WOOD / METAL ROOF SYSTEM cedar breather rapid ridge 7

WALL SYSTEMS

AIR BARRIER DRAINABLE HOUSEWRAP SYSTEM

hydrogap* sa hydrofiash* uv+ hydrofiash* la

DRAINABLE HOUSEWRAP SYSTEM

hydrogap" drainable housewrap hydroflash"



COULD beginner Golper Unservand Seite Breiter, Golgert, Scheren, Rub wentt, Rapp Bolgett, Stark wentt, Daster ventte Foldmark, Hyrnologit, Hyror and Gold Hyror anienth an improved tastertaris. In Berginni Coldyin 1999

UV-PROTECTED RAINSCREEN SYSTEM

invisiwrap®uv hydroflash®uv+ batten uv

HOUSEWRAP SYSTEM

hydroflash^e

RAINSCREEN SYSTEM

slicker* rainscree flatwrap* hp hydrofiash* slicker* screen batten uv

