

CEDAR BREATHER SYSTEM PROTECTION

Cedar Breather® | Rapid Ridge® | Batten UV




CEDAR BREATHER SYSTEM

There's nothing quite like the aesthetic of an authentic, cedar roof. Building practice and the composition of cedar itself has changed dramatically since it was first installed on a roof. In spite of these changes, there remains an opportunity to install a beautiful cedar roof that will stand the test of time.

The wood roofing protection system marries two key products: Cedar Breather underlayment and Rapid Ridge 7. Together, these products provide a ventilated space behind the cedar shakes or shingles, allowing the cedar to dry and live its full, beautiful life.

35 YEAR SYSTEM WARRANTY

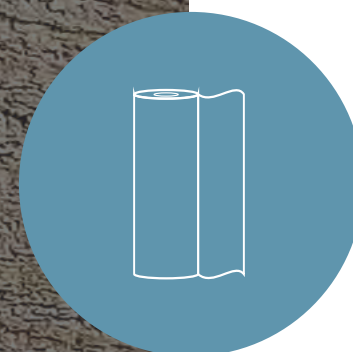

EASY TO INSTALL



VENTILATES ROOFING MATERIAL





CEDAR BREATHER®

WIDTH

3.25 ft (1 m)

LENGTH PER ROLL

61.5 ft (18.75 m)

COVERAGE

200 sq. ft

WEIGHT

9.7 lbs per roll

COMPRESSION & THICKNESS

Zero lbs per sq ft .27 in

100 lbs per sq ft .26 in

200 lbs per sq ft .25 in

Cedar Breather is the solution for preserving the beauty and life of wood roofing. Easier to install and providing more airflow than traditional wood strapping, Cedar Breather provides a continuous space for drainage and drying behind shingles or shakes.

Patented three-dimensional matrix allows continuous airflow and provides cushioning during severe hail

Quick and easy installation without any special tools

Protects the beauty and life of wood roofing by eliminating excess moisture, prevents thermal cupping, warping, and rotting.

Meets approved installation methods per the Cedar Shake & Shingle Bureau

Can also be used for metal roofing applications

RAPID RIDGE® 7

Rapid Ridge® 7 is specifically designed for use with narrow hip and ridge shingles, cedar and slate. For optimum performance in wood roofing applications, use Rapid Ridge® 7 with Cedar Breather®.

- WIDTH
7 in
- LENGTH PER ROLL
20 ft
- THICKNESS
5/8 in
- NET FREE AREA
12.5 in²/lin ft

BATTEN UV

Batten UV has several unique applications throughout the Benjamin Obdyke product line. In a cedar roof application, the consistent airflow offered by Batten UV is perfect as a perimeter vent for Cedar Breather®.

- PACKAGING
64 battens per carton
- THICKNESS (SIZE OF GAP)
.375 in
- WIDTH
1.5 in
- LENGTH PER BATTEN
37.5 in (.95 m)
- MAX. UV EXPOSURE
365 days (before siding coverage)
- COMPOSITION
Polyethylene

Build Better

with Benjamin Obdyke
Roof & Wall products


ROOF SYSTEMS

RIDGE VENTILATION PRODUCTS

roll vent®
rapid ridge®
cougar® lp
shark vent®
xtractor vent®

WOOD / METAL ROOF SYSTEM

cedar breather®
rapid ridge® 7
batten uv

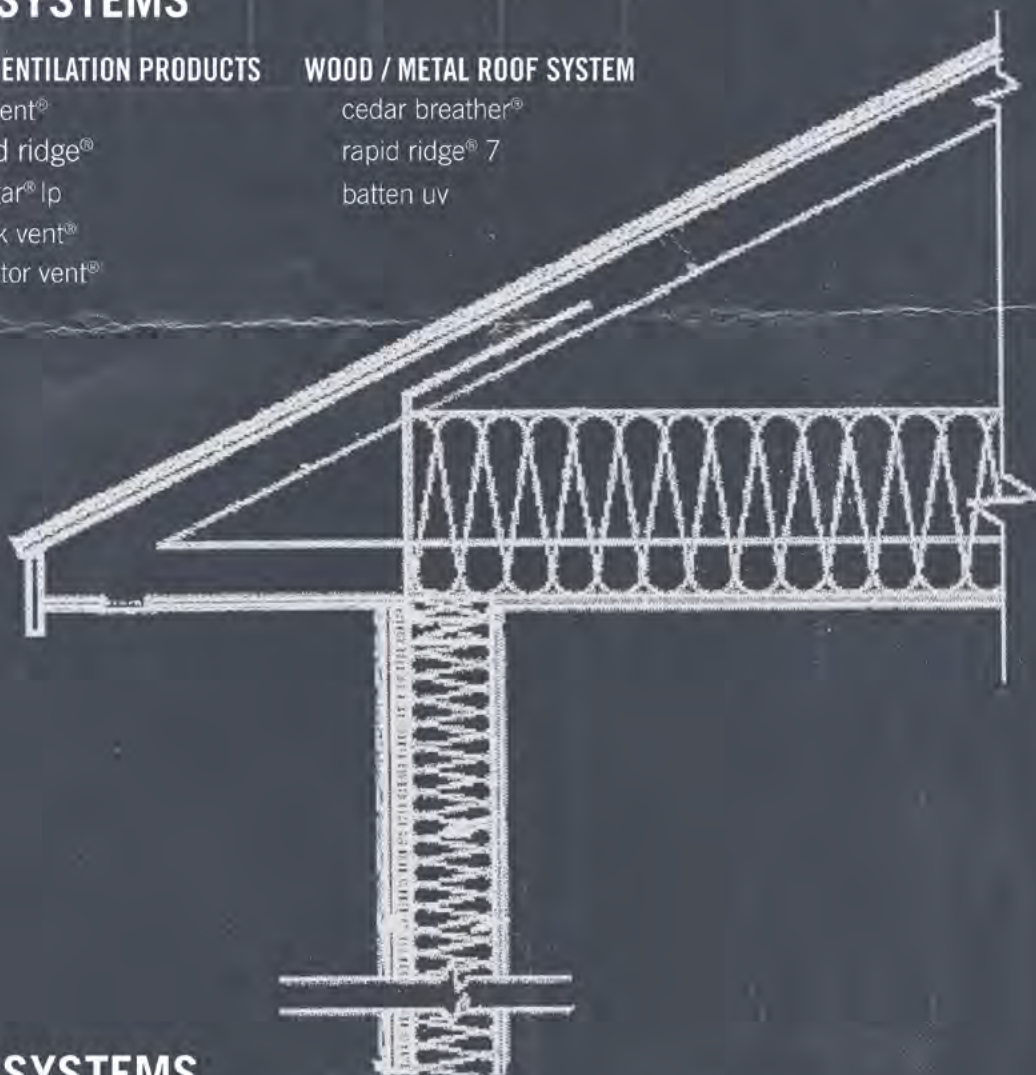

WALL SYSTEMS

AIR BARRIER DRAINABLE HOUSEWRAP SYSTEM

hydrogap® sa
hydroflash® uv+
hydroflash® la

UV-PROTECTED RAINSCREEN SYSTEM

invisiwrap® uv
hydroflash® uv+
batten uv

RAINSCREEN SYSTEM

slicker® rainscreen
flatwrap® hp
hydroflash®
slicker® screen
batten uv

DRAINABLE HOUSEWRAP SYSTEM

hydrogap® drainable housewrap
hydroflash®

HOUSEWRAP SYSTEM

flatwrap® hp
hydroflash®



BENJAMIN OBDYKE
roof & wall products

©2021 Benjamin Obdyke Incorporated. Cedar Breather®, Cougar®, Slicker®, Roll Vent®, Rapid Ridge®, Shark Vent®, Xtractor Vent®, FlatWrap®, HydroGap®, HydroFlash®, and HydroCorner® are registered trademarks of Benjamin Obdyke Incorporated.

PRINTED 2021