



# HYDROTAPE<sup>®</sup> DS

DOUBLE-SIDED SEALING TAPE

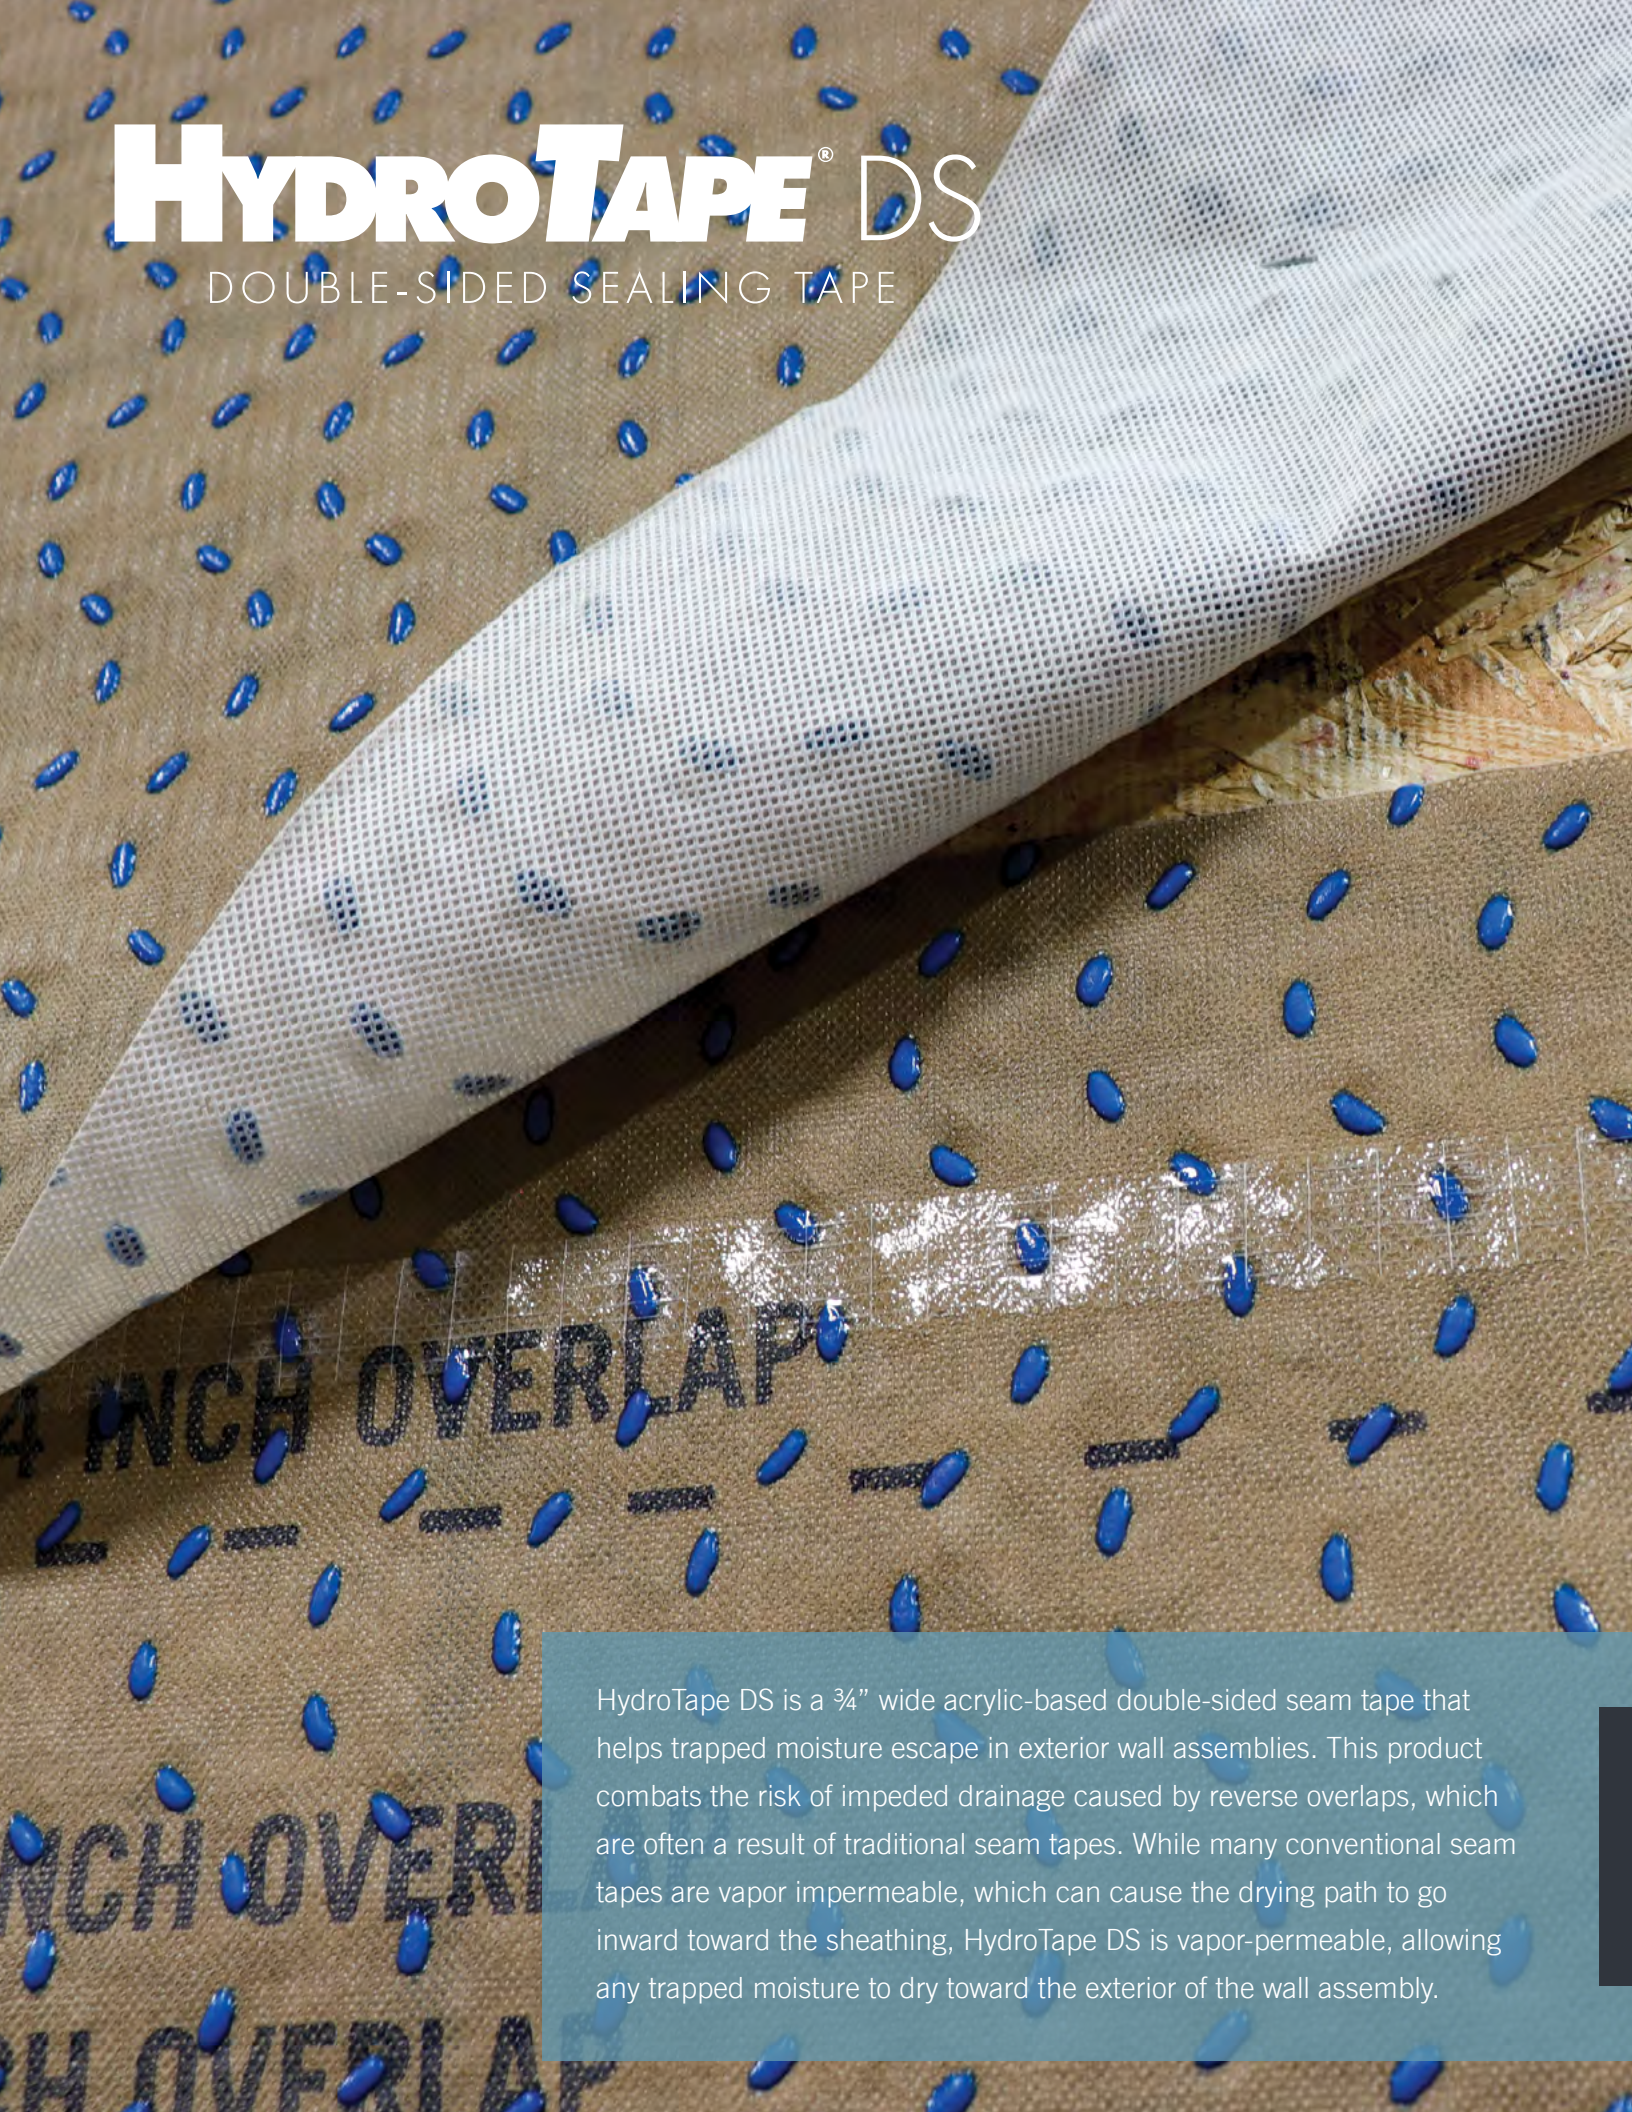

HydroTape DS is a  $\frac{3}{4}$ " wide acrylic-based double-sided seam tape that helps trapped moisture escape in exterior wall assemblies. This product combats the risk of impeded drainage caused by reverse overlaps, which are often a result of traditional seam tapes. While many conventional seam tapes are vapor impermeable, which can cause the drying path to go inward toward the sheathing, HydroTape DS is vapor-permeable, allowing any trapped moisture to dry toward the exterior of the wall assembly.

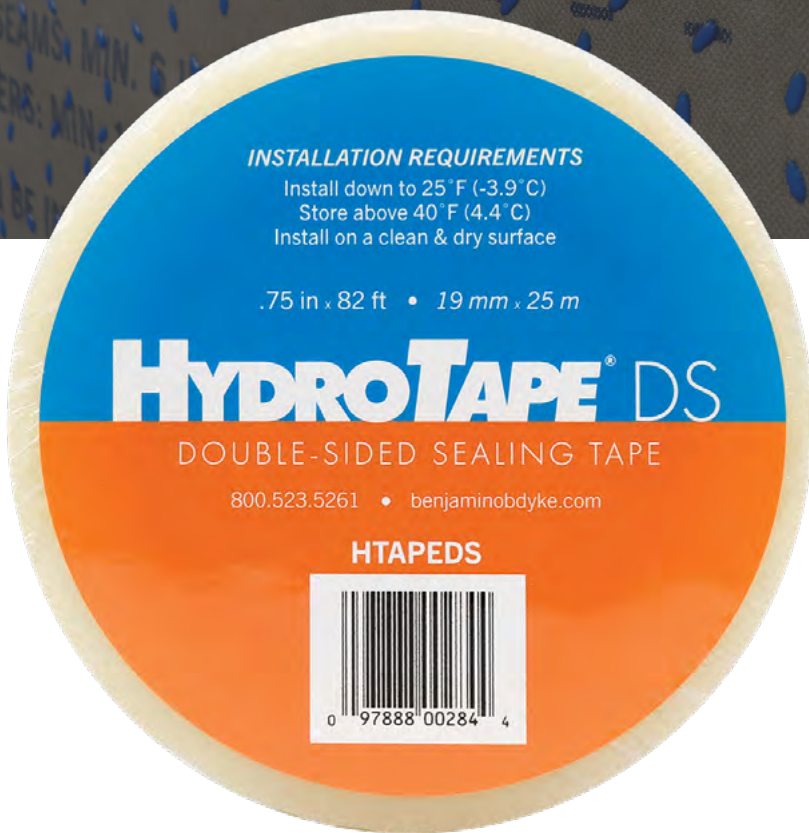

**INSTALLATION REQUIREMENTS**

Install down to 25°F (-3.9°C)  
Store above 40°F (4.4°C)  
Install on a clean & dry surface

.75 in x 82 ft • 19 mm x 25 m

**HYDROTAPE® DS**

DOUBLE-SIDED SEALING TAPE

800.523.5261 • benjaminobdyke.com

**HTAPEDS**



**WIDTH**

.75 inches

**LENGTH PER ROLL**

82 ft. (25 m)

**ADHESIVE**

acrylic

**MAX. UV EXPOSURE**

180 days

**TEMPERATURE RANGE**

Install down to 25°F,  
store above 40°F

**VAPOR PERMEABILITY**

4 perms

Acrylic, vapor-permeable adhesive with a reinforcement scrim prevents trapped moisture

Allows for WRBs to be sealed at the seams without creating a reverse flash

For installation between the layers of WRB at the overlaps - eliminates potential for “fishmouths” seen with traditional seam tape

Can be used to adhere the WRB edges against the sheathing for a continuous air control layer