InvisiWrap® SA

SELF-ADHERED WRB WITH ENHANCED UV RESISTANCE

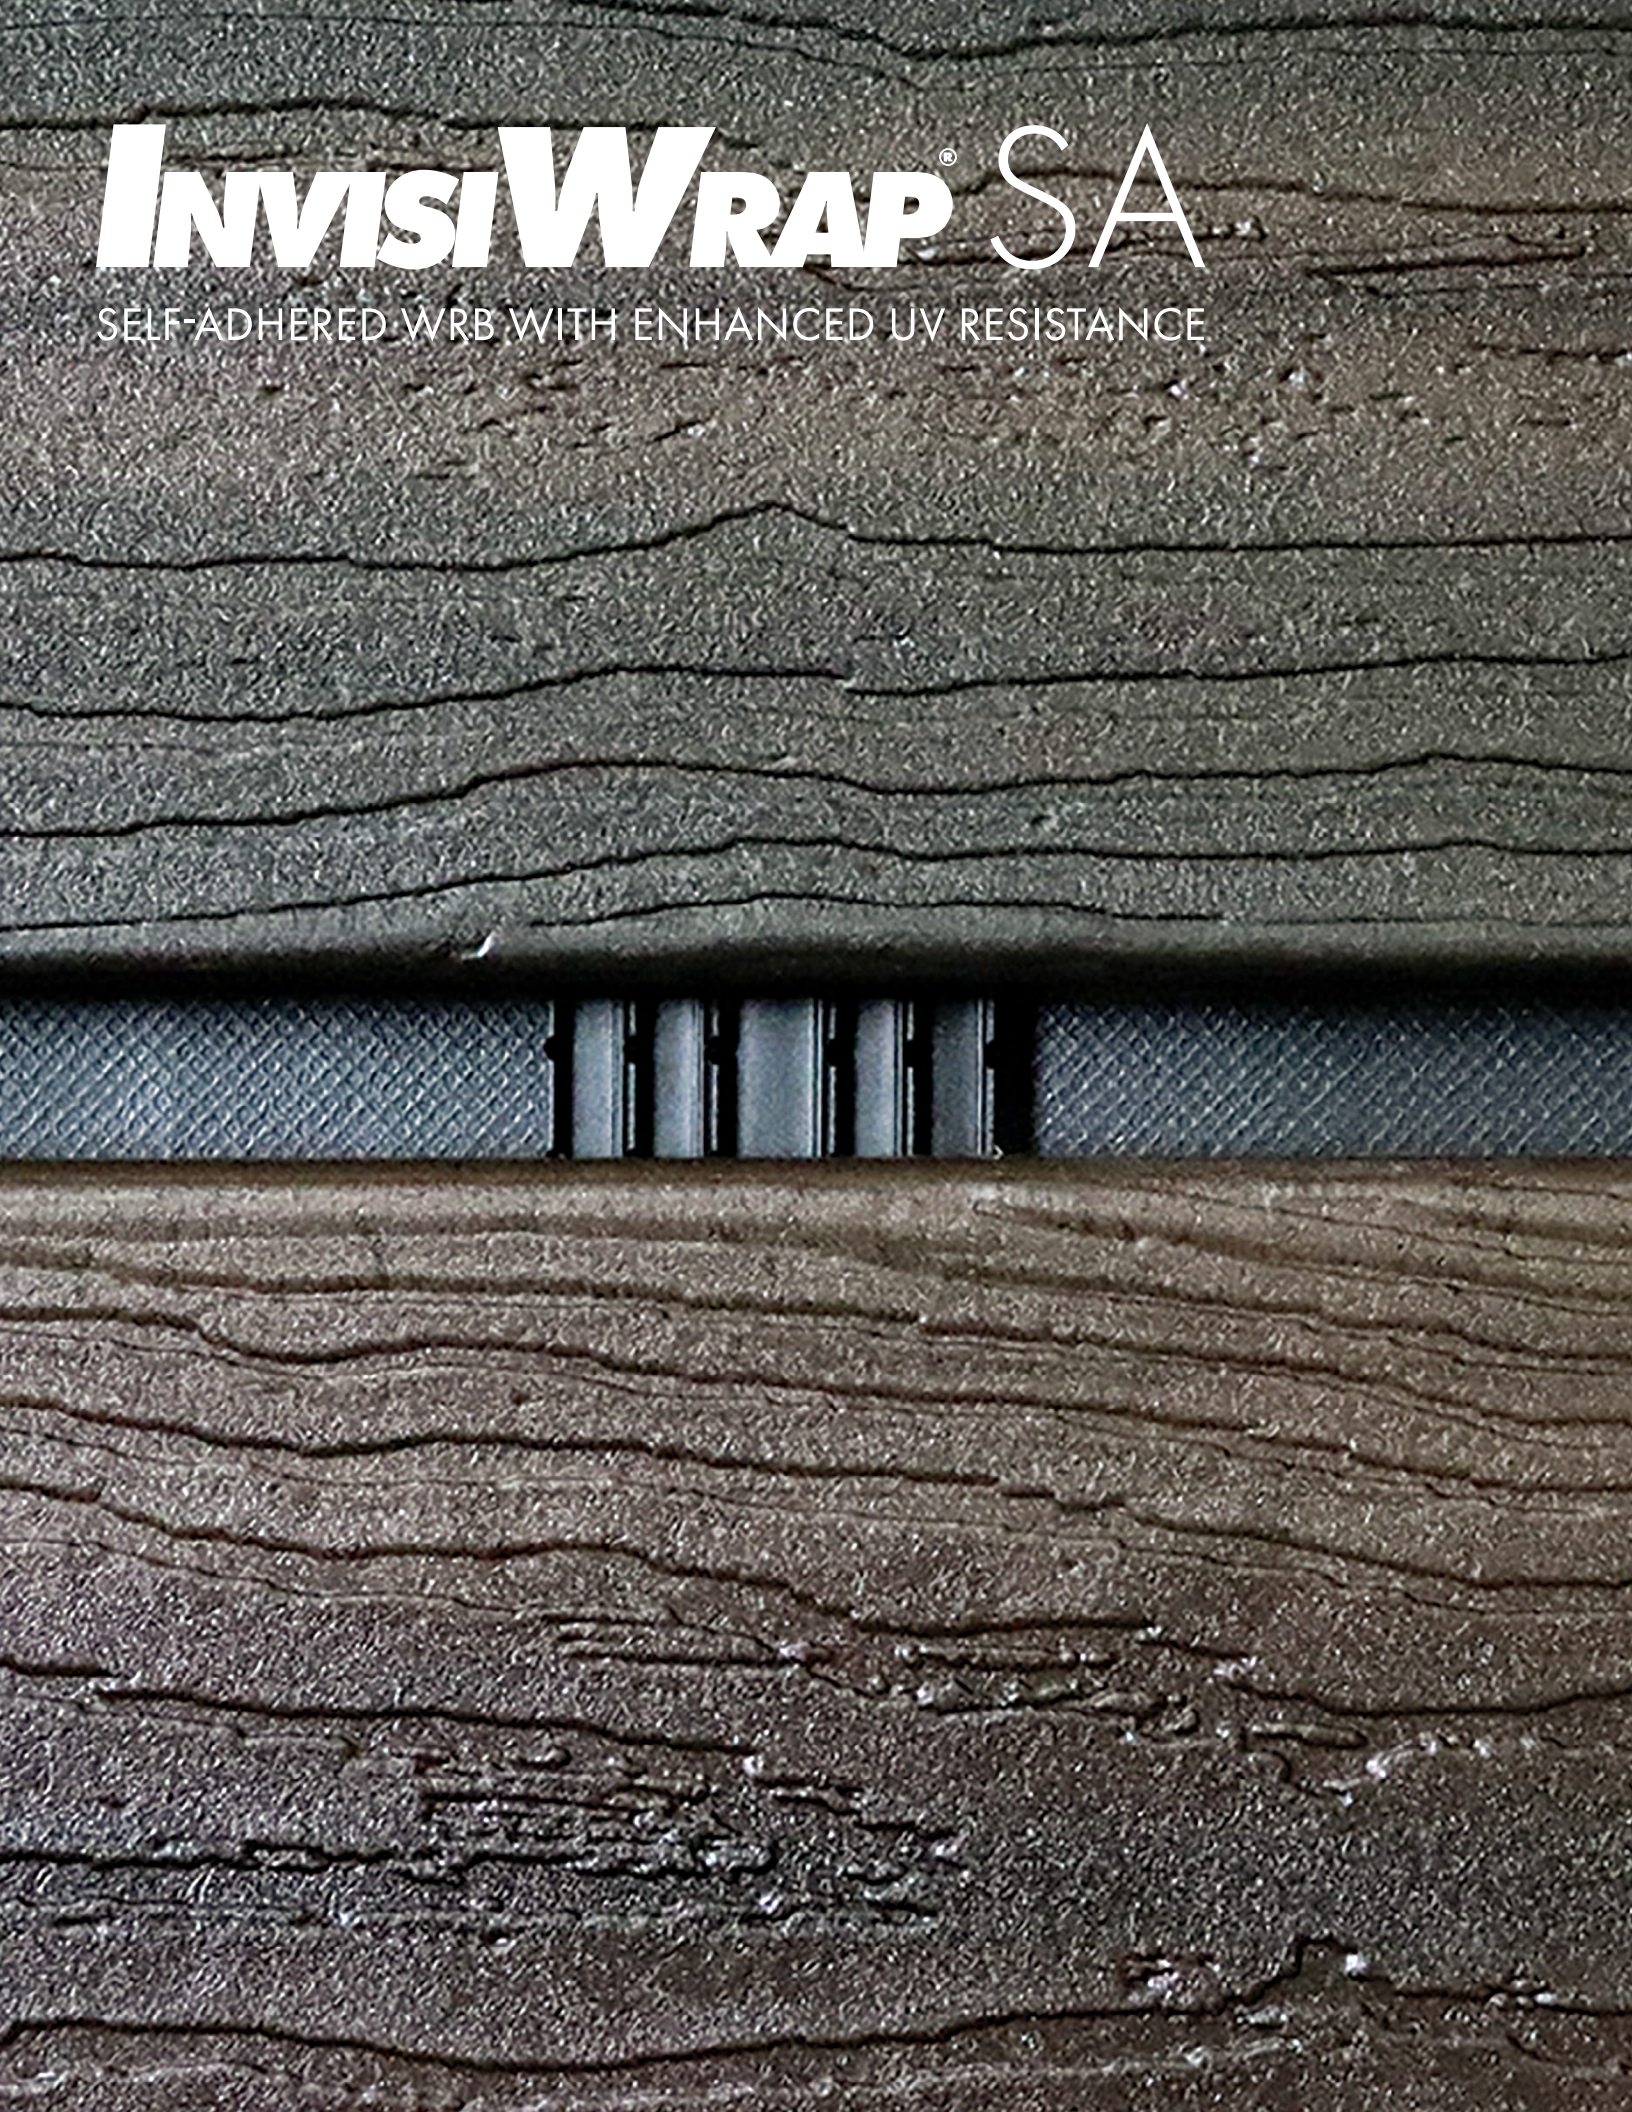

WIDTH

4.75 ft. (1.45 m)

LENGTH

80 ft. (24.38 m)

MAXIMUM UV EXPOSURE

365 days

VAPOR PERMEABILITY

12 perms

ADHESIVE

continuous acrylic

12 month UV exposure rating before siding installation

Warrantied with siding openings up to 2 inches

Part of the UV Protected Rainscreen System 25 year system warranty

Adheres to OSB, CDX, plywood, & CMU without the use of a primer above 25° F

100% continuous acrylic adhesive technology provides a true sealing around every fastener and penetration point

800.523.5261 • techsupport@obdyke.com

BENJAMIN OBDYKE
roof & wall products