

RIDGE VENTILATION PRODUCT SOLUTIONS

Roll Vent® | Rapid Ridge®
Cougar® LP | Shark Vent® | Xtractor Vent®


BENJAMIN OBDYKE
roof & wall products

RIDGE VENTILATION PRODUCTS

Whatever flavor of ridge ventilation you’re after — we’ve got it. As the inventors of the first ridge vent on a roll (Roll Vent), we have over 30 years of experience in ridge vent technology.

With over 100 million linear feet of ridge vent sold since 1987, we’re proud to be a trusted resource for high-quality ridge ventilation products and expertise.

LIFETIME LIMITED WARRANTY

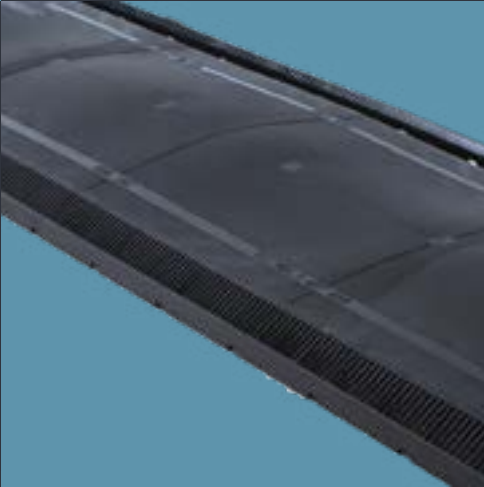


Ridge Vent works on the basis of several principles.

Adequate soffit ventilation coupled with ridge ventilation produces a pathway for continuous airflow along the entire underside of the roof deck. Airflow is maintained two ways.

First, hot air naturally rises and exits out the ridge vent, pulling in cooler air from below. Second, positive airflow across the ridge of the house creates a “venturi effect”, or a negative pressure, which pulls air out of the ridge vent and brings in cooler air from the soffits below. In calm or windy weather, the entire attic is vented by a constant flow of cooler, dryer outside air.

HOW RIDGE VENT WORKS

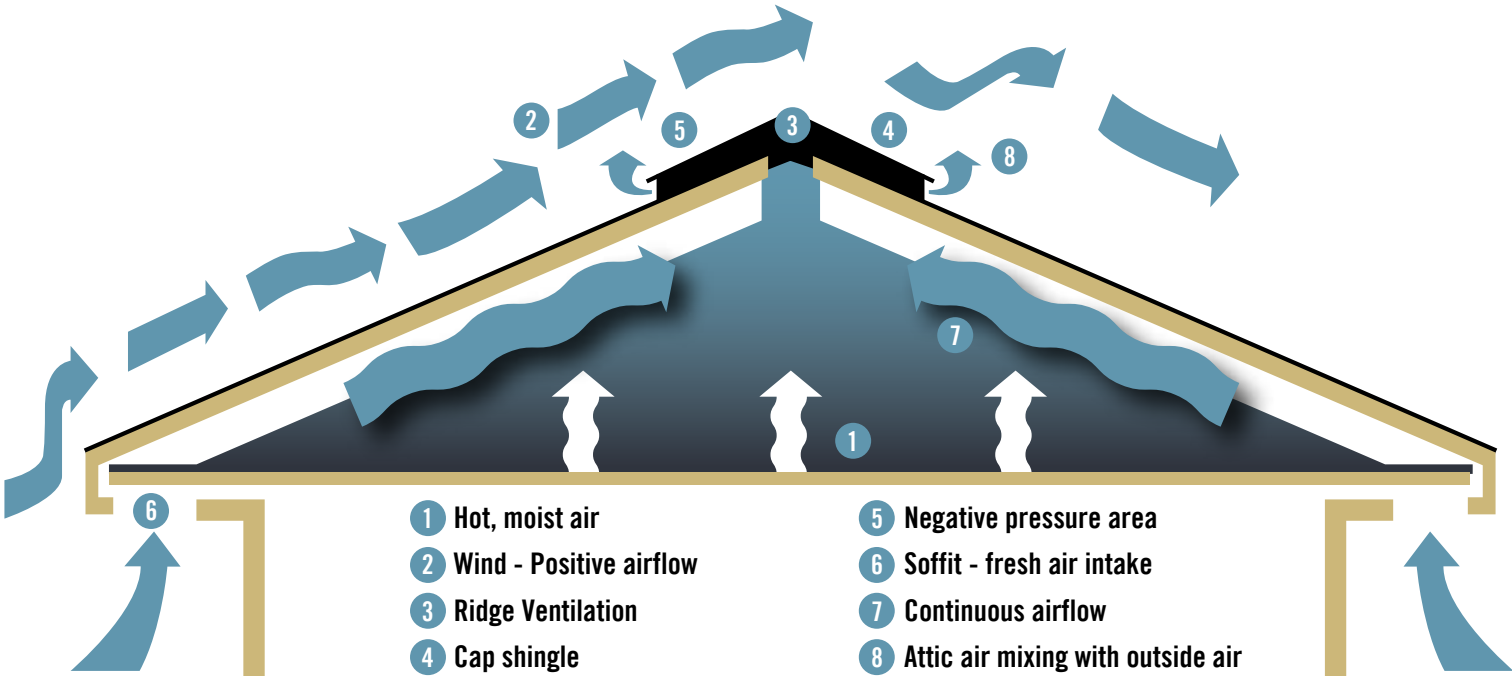

Trying to decide which ridge vent is best for your project?

Take a look at some of the factors to consider when deciding which ridge vent works best for your style, installation, and aesthetic. Do you have a unique build that you would like to discuss in more detail? Give us a call at (215) 672-7200 or email us at techsupport@obdyke.com.

	NET FREE AREA (sq. in./lin. ft.)	STYLE			INSTALLATION		AESTHETIC			SPECIAL APPLICATION
		ROLLED	SECTIONAL	HAND NAIL	NAIL GUNNABLE	GALVANIZED NAILS INCLUDED	EXTERNAL BAFFLE	HIDDEN	FILTERED	
Roll Vent standard	18	•		•		•		•	•	
Rapid Ridge standard	12.5	•			•	•		•	•	
Rapid Ridge 7	12.5	•			•			•	•	wood or slate
Cougar LP	13.5	•			•	•		•		
Xtractor Vent XLP	12.75		•		•	•	•			
Xtractor Vent X18	18		•	•		•	•			
Xtractor Vent X18 xtra	18		•	•			•		•	
Shark Vent XLP	12	•			•	•	•			

Roll Vent® ridge vent offers the most innovative, effective way to protect residential roofing from the deteriorating forces of excess heat and moisture build-up. Roll Vent is available in 20 or 50 foot rolls.

Breathable weather barrier that prevents rain, snow and insect infiltration

Wing tip design prevents shingles from folding over ridge vent, cutting off ventilation

End plug free installation saves time by shingling over

See-through hinge makes it easy to center over the ridge

Visible nail line for easier alignment

Compression resistant design



ROLL VENT®
CONTINUOUS
RIDGE VENT

NET FREE AREA

18 in²/ lin ft

WIDTH

10.5 in

LENGTH

20 ft & 50 ft rolls

THICKNESS

.9 in

WARRANTY

Lifetime Limited

Code Approvals:
Florida Building Code (FL 7751) - Standard Only
Meets or exceeds: ICC, FHA, HUD, and NBC



NET FREE AREA

12.5 in² / lin ft

WIDTH

10.5 in

LENGTH

20 ft & 50 ft rolls

THICKNESS

.625 in

WARRANTY

Lifetime Limited

Rapid Ridge® nail-gunnable ridge vent offers the quickest installation of any rolled roof ventilation product on the market, complete with superior weather and insect infiltration protection. The lightest ridge vent on a roll, Rapid Ridge is available in two widths — Rapid Ridge Standard and Rapid Ridge 7.

Low profile design provides sleek and almost invisible protection

Breathable weather barrier prevents rain, snow, and insect infiltration

Wing tip design prevents shingles from folding over ridge vent, cutting off ventilation

See-through hinge makes it easy to center over the ridge

End plug free installation saves time by shingling over

Hot dipped collated galvanized ring-shank nails included

Nail-gunnable for fast installation

Compression resistant design

Code Approvals:

Florida Building Code (FL 7751) - Standard Only
Meets or exceeds: ICC, FHA, HUD, and NBC

Rapid Ridge® 7 is specifically designed for use with narrow hip and ridge shingles, cedar and slate. For optimum performance in wood roofing applications use Rapid Ridge 7 with Cedar Breather® and VaporDry® SA. Rapid Ridge is also available in Standard sizes.

Made specifically for narrow hip and ridge shingles, including cedar and slate

Low profile design provides sleek and almost invisible protection

Wing tip design prevents shingles from folding over ridge vent, cutting off ventilation

See-through hinge makes it easy to center over the ridge

Compression resistant design

Hot dipped collated galvanized ring-shank nails included

NET FREE AREA

12.5 in² / lin ft

WIDTH

7 in

LENGTH

20 ft rolls

THICKNESS

.625 in

WARRANTY

Lifetime Limited



Code Approvals:
Meets or exceeds: ICC, FHA, HUD, and NBC

215.672.7200 • techsupport@obdyke.com

BENJAMIN OBDYKE
roof & wall products



NET FREE AREA
13.5 in² / lin ft

WIDTH
10.5 in

LENGTH
20 ft & 50 ft rolls

THICKNESS
.6 in

WARRANTY
Lifetime Limited

Cougar® LP Ridge Vent is an easy to install classic style ridge vent. It can be installed by hand or with a pneumatic nail gun (coil nails are included).

Low-profile design provides a sleek and almost invisible protection

End plug free installation saves time by shingling over

Flat back for easy installation

Nail-gunnable for fast installation

Hot dipped collated galvanized ring-shank nails included

Easy to handle, lightweight roll

Compression resistant design

Code Approvals:
Florida Building Code (FL 7751)
Meets or exceeds: ICC, FHA, HUD, and NBC

Meet the best of both worlds. Shark Vent combines the rigidity of a sectional vent, with the fast installation of a roll.

Patented internal and external baffle system prevents wind-driven rain and snow infiltration

Nail guides, slot guides, and center guide to simplify the alignment of shingles and nail placement

New external baffle design that conforms better to architectural shingles

Low-profile design creates a smooth finish and resists cracking in cold weather applications

Hot dipped collated galvanized ring-shank nails included

Easy to handle, lightweight roll

Compression resistant design



NET FREE AREA

12 in² / lin ft

WIDTH

14.75 in

LENGTH

25 ft rolls

THICKNESS

.625 in

WARRANTY

Lifetime Limited

Code Approvals:
Miami Dade - XLP Only
Florida Building Code (FL 7751) - XLP Only
Meets or exceeds: FHA, HUD, ICC, MDC and NBC

X18
XTRACTOR VENT®
EXTERNALLY BAFFLED
RIDGE VENT

NET FREE AREA
18 in² / lin ft

WIDTH
14.75 in

LENGTH
4 foot sections

THICKNESS
.8125 in

WARRANTY
Lifetime Limited

Xtractor Vent® X18 externally baffled, shingle over ridge vent offers maximum roof ventilation — 18 square inches of net free area per linear foot — for ultimate protection from heat and moisture. X18 is also available with an internal filter option for extra protection against extreme weather, X18 Xtra.

Integrated end plugs throughout for structural integrity and to reduce scrap

Pre-drilled nail holes for proper fastening of vent

Embossed nail lines for correct nail placement and an embossed center line for proper alignment on the ridge

External and internal baffles prevent wind driven rain and snow infiltration

Maximum ventilation, 18 square inches of net free area per linear foot

Compression resistant design

Narrow 1/8 in. wide vent holes

Available with filter fabric:



X18
XTRACTOR VENT® XTRA

Code Approvals:
Miami Dade
Florida Building Code (FL 7751)
Meets or exceeds: FHA, HUD, ICC, MDC and NBC

A low-profile externally baffled ridge vent, Xtractor Vent® XLP works in conjunction with a soffit system to extract heat and moisture out of the attic. XLP ridge vent is designed specifically for fast installation with the use of a nail gun.

Integrated end plugs throughout for structural integrity and to reduce scrap

Embossed nail lines for correct nail placement and an embossed center line for proper alignment on the ridge

External and internal baffles prevent wind driven rain and snow infiltration

Hot dipped collated galvanized ring-shank nails included

Low-profile sectional design

Compression resistant design

Nail-gunnable for fast installation



NET FREE AREA

12.75 in² / lin ft

WIDTH

14 in

LENGTH

4 foot sections

THICKNESS

.625 in

WARRANTY

Lifetime Limited

Code Approvals:
Miami Dade
Florida Building Code (FL 7751)
Meets or exceeds: FHA, HUD, ICC, MDC and NBC

For technical questions:
215.672.7200
techsupport@obdyke.com

400 Babylon Road, Suite A
Horsham, PA 19044
215.672.7200

2026 Benjamin Obdyke Incorporated: Roll Vent®,
Rapid Ridge®, Cougar®, Shark Vent® and Xtractor Vent®
are registered trademarks of Benjamin Obdyke Incorporated.
REV 10/01/2026

